



**USAID**  
FROM THE AMERICAN PEOPLE

# CLIMATE CHANGE AND WATER RESOURCES IN WEST AFRICA: AN ASSESSMENT OF GROUNDWATER MANAGEMENT

MARCH 2014

This report is made possible by the support of the American people through the U.S. Agency for International Development (USAID). The contents are the sole responsibility of Tetra Tech ARD and do not necessarily reflect the views of USAID or the U.S. Government.



ARCC



African and Latin American  
Resilience to Climate Change Project

This report was prepared by D. Hammond Murray-Rust<sup>1</sup> and S.H.M. Fakhruddin<sup>2</sup> through subcontracts with Tetra Tech ARD.

<sup>1</sup> Independent Consultant

<sup>2</sup> Regional Integrated Multi-Hazard Early Warning System (RIMES)

Cover Photo: Traditional water well near Maradi, Niger. April 2008. Credit: D. Hammond Murray-Rust.

This publication was produced for the United States Agency for International Development by Tetra Tech ARD, through a Task Order under the Prosperity, Livelihoods, and Conserving Ecosystems (PLACE) Indefinite Quantity Contract Core Task Order (USAID Contract No. AID-EPP-I-00-06-00008, Order Number AID-OAA-TO-11-00064).

**Tetra Tech ARD Contacts:**

**Patricia Caffrey**

Chief of Party

African and Latin American Resilience to Climate Change (ARCC)

Burlington, Vermont

Tel.: 802.658.3890

Patricia.Caffrey@tetratech.com

**Anna Farmer**

Project Manager

Burlington, Vermont

Tel.: 802.658.3890

Anna.Farmer@tetratech.com

CLIMATE CHANGE AND WATER RESOURCES IN WEST AFRICA:  
**AN ASSESSMENT OF  
GROUNDWATER MANAGEMENT**

AFRICAN AND LATIN AMERICAN RESILIENCE TO CLIMATE CHANGE (ARCC)

MARCH 2014

# TABLE OF CONTENTS

<b>ACRONYMS AND ABBREVIATIONS</b> .....	<b>IV</b>
<b>ABOUT THIS SERIES</b> .....	<b>VI</b>
<b>EXECUTIVE SUMMARY</b> .....	<b>VII</b>
<b>1.0 INTRODUCTION</b> .....	<b>I</b>
1.1 GROUNDWATER AS A DRIVER OF DEVELOPMENT .....	I
1.2 THREATS TO GROUNDWATER-BASED DEVELOPMENT .....	I
1.3 PURPOSE OF THE STUDY .....	3
1.4 SCOPE OF THE STUDY .....	3
<b>2.0 GROUNDWATER IN WEST AFRICA</b> .....	<b>5</b>
2.1 HYDROGEOLOGIC SETTING .....	5
2.2 GROUNDWATER HYDROLOGY .....	13
<b>3.0 CLIMATE CHANGE AND GROUNDWATER</b> .....	<b>19</b>
3.1 CLIMATE CHANGE IMPACTS ON GROUNDWATER .....	19
3.2 MODELLING THE IMPACT OF CLIMATE CHANGE ON GROUNDWATER .....	22
<b>4.0 GROUNDWATER USE IN RURAL WEST AFRICA</b> .....	<b>28</b>
4.1 EARLY-PHASE EXPLOITATION .....	28
4.2 THE ADVENT OF BOREHOLES AND MANUAL PUMPING .....	29
4.3 THE INCREASING ROLE OF MOTORIZED PUMPS .....	31
<b>5.0 IWRM AND GROUNDWATER MANAGEMENT</b> .....	<b>35</b>
5.1 THE VISION OF IWRM .....	35
5.2 PRACTICAL STEPS TOWARD IMPROVED GROUNDWATER MANAGEMENT .....	37
5.3 TWO SPECIAL CASES FOR GROUNDWATER MANAGEMENT .....	42
<b>6.0 KEY QUESTIONS: WHAT CAN BE DONE?</b> .....	<b>45</b>
6.1 IMPROVING INFORMATION ON GROUNDWATER AND ITS EXPLOITATION .....	46
6.2 GROUNDWATER DEMAND MANAGEMENT ACTIVITIES .....	46
6.3 MANAGEMENT OF GROUNDWATER SUPPLY .....	47
6.4 IWRM INSTITUTION-BUILDING AT THE LOCAL LEVEL .....	48

**7.0 CONCLUSIONS..... 50**  
**8.0 SOURCES..... 51**  
**ANNEX A. GROUNDWATER MAPS ..... 54**

# ACRONYMS AND ABBREVIATIONS

AMMA	African Monsoon Multidisciplinary Analysis
ARCC	African and Latin American Resilience to Climate Change
BGR	Federal Institute for Geosciences and Natural Resources, Germany
CATCH	<i>Couplage de l'Atmosphère Tropicale et du Cycle Hydrologique</i>
CCLM	Consortium for Small-Scale Modeling – Climate Modeling
CREPA	<i>Centre Regionale pour l'Eau Potable et de l'Assainissement au cout faible</i>
DRI	Desert Research Institute
FAO	Food and Agriculture Organization
GCM	Global Circulation or Climate Model
GEF	Global Environment Facility
GWP	Global Water Partnership
IGRAC	International Groundwater Resource Assessment Center
IPCC	International Panel for Climate Change
IUCN	International Union for Conservation of Nature
IWMI	International Water Management Institute
IWRM	Integrated Water Resources Management
KML	Keyhole Markup Language
MDG	Millennium Development Goals
MLPI	Mali Livestock and Poultry Initiative
MUS	Multiple Use Services for water
NGO	Nongovernmental Organization
SIGIRE	<i>Systeme d'Information pour la Gestion Integree des Ressources en Eau</i>
SKAT	Swiss Centre for Development Cooperation in Technology and Management
SWAT	Soil Water Assessment Tool
UNESCO	United Nations Educational Scientific and Cultural Organization
USAID	United States Agency for International Development
USDA	United States Department of Agriculture

WSA	Water and Sanitation in Africa (formerly CREPA)
WAWI	West Africa Water Initiative
WEAP	Water Evaluation and Planning model
WHO	World Health Organization
WHYMAP	World-wide Hydrogeological Mapping and Assessment Programme
WUA	Water User Association

# ABOUT THIS SERIES

## **THE STUDIES ON CLIMATE CHANGE VULNERABILITY AND ADAPTATION IN WEST AFRICA**

This document is part of a series of studies produced by the African and Latin American Resilience to Climate Change (ARCC) project that address adaptation to climate change in West Africa. Within the ARCC West Africa studies, this document falls in the subseries on Climate Change and Water Resources in West Africa. ARCC has also developed a subseries on Agricultural Adaptation to Climate Change in the Sahel, Climate Change and Conflict in West Africa, and Climate Change in Mali.

## **THE SUBSERIES ON CLIMATE CHANGE AND WATER RESOURCES**

Upon the request of the United States Agency for International Development (USAID), ARCC undertook the West Africa water studies to increase understanding of the potential impacts of climate change on water resources in West Africa and to identify means to support adaptation to these changes. Other documents in the Climate Change and Water Resources in West Africa series include Transboundary River Basins, Mapping the Exposure of Socioeconomic and Natural Systems of West Africa to Coastal Climate Stressors, and Coastal Biophysical and Institutional Analysis.

# EXECUTIVE SUMMARY

This paper addresses the potential impacts of climate change on groundwater management in West Africa. Its general focus is sustainability of rural groundwater resources, because most rural populations heavily depend on groundwater. The recommended approach to achieving this goal is to start at local levels and slowly build up larger and more formal organizations to share in the governance not only of groundwater but of all water resources, and to ensure that water resources are not permanently depleted.

Variations in the hydrogeology of West Africa are large but fall into two main categories: the large sedimentary basins of the major rivers that have continuous aquifers, and the extensive areas of basement complex rocks with lateritic cover that provide limited groundwater in discontinuous aquifers.

There has been a huge increase in exploitation of groundwater resources mostly to provide drinking water under the auspices of the Millennium Development Goal targets. This exploitation in rural areas has relied heavily on drilling boreholes and installing hand pumps, with extraction rates generally sufficiently low enough to not threaten the long-term sustainability of the underlying aquifer.

Nevertheless, current levels of groundwater resources and their exploitation are threatened in three ways:

1. Climate change predictions of increased temperatures as well as more erratic and variable rainfall during the present century are likely to lead to a decrease in recharge, as more water will be lost to transpiration and evaporation. Areas with basement complex geology and lower rainfall are the most vulnerable to declining aquifer discharge.
2. Population growth rates in rural areas at about 3 percent per annum mean that twice as much drinking water will be required in 25 years. Urban areas relying on groundwater for drinking will be much more vulnerable due to rapid urbanization.
3. Technological changes probably pose the greatest threat to groundwater sustainability. Any increase in the use of motorized pumping places additional stress on any aquifer. Although currently beyond the purchasing power of smallholders, there is increasing promotion of both diesel and solar powered irrigation. While potentially manageable for very small garden plots, increased commercialization will definitely require more water.

There is weak institutional capacity for effective governance of water throughout the region. Water management initiatives are mostly confined to national-level dialogue and do not reach down to the local level, where water is actually managed. Databases tend to be concentrated in national capitals and do not act as useful management tools for those who actually manage water.

There is increasing recognition that Integrated Water Resources Management (IWRM) is the best option for sustainable exploitation of water, not only at national level but also at the local level, where day-to-day decisions are made about water use. Introduction of IWRM requires adoption of two key approaches from the outset:

1. Groundwater cannot be managed independently of surface water. The two are connected hydrologically. IWRM requires that all sources and types of water are included in the management

program. Management approaches must not only address demand-side issues — such as making water use more efficient through education, changes in cropping practices, pricing, and regulation — but also supply-side management, including better natural resources management, soil conservation technologies, and augmenting groundwater recharge. Insofar as climate change will increase evapotranspiration and the variability of variable rainfall, integrated management of all water resources will be a priority.

2. IWRM is a participatory process. It does not function properly when left solely to government departments and agencies. Water users help define the management targets and techniques, they help police and regulate water use, and they sit on boards of directors of water management districts. Ultimately it is the water users themselves, acting individually and collectively, who control the destiny of their water resources. Without their full and equal involvement, the water resources of West Africa may become another “tragedy of the commons.”

The paper concludes with a proposed course of action that will allow for implementation of appropriate and feasible aspects of an IWRM in a rural setting in West Africa. The underlying model is Multiple-Use Services (MUS) of water, successfully piloted in Niger using United States Agency for International Development (USAID) funding under the recent West Africa Water Initiative (WAWI), a multi-donor program for water, sanitation, and health. IWRM looks at all water resources in a community and all demands for water (domestic, livestock, agriculture, aquaculture, and ecosystem) and provides a comprehensive management plan for resource use that does not deplete resources beyond annual replenishment by rainfall or rivers. With some modifications, it should be possible to add an IWRM component to agricultural and food security programs so that there is proper integration of water, agriculture, and human development.

If effective management systems for both groundwater and surface water are established, then it is possible to envisage stable production systems that have the capacity to respond to external threats, including but not limited to the effects of climate change. Where water resources are sufficient, these stable systems can include irrigation as well as more traditional uses of domestic water supply and livestock.

# 1.0 INTRODUCTION

## 1.1 GROUNDWATER AS A DRIVER OF DEVELOPMENT

Access to good quality groundwater has transformed the lives of tens of millions of people in West Africa. Rural populations that once depended on unreliable and polluted surface water sources or unprotected hand-dug wells now have access to potable water. With proper installation of wells supported by strong local management arrangements, groundwater is generally free of biological contaminants. This approach has profound impacts on rural health reduces child and maternal mortality, reduces incidences of many water related diseases, and reduces the drudgery of walking miles to arrive at the nearest water source. Children, and particularly girls, have greater opportunities to attend school. Impacts on health related to groundwater chemistry, particularly arsenic, are less well documented and may be significant locally. Nevertheless, with few exceptions, groundwater provides a far better option for safe drinking water than surface water.

The exploitation of groundwater has been made possible by huge investments and concerted efforts of countries within the region, supported by multi-lateral and bilateral donors, major international nongovernment organizations (NGOs), and myriad private NGOs. The prospect of providing access to good quality water, now viewed as a fundamental human right, captured the imagination of the world and helped focus efforts with the establishment of the Millennium Development Goals (MDG) that aim to reduce poverty and misery globally.

Although most countries in West Africa have not yet attained the MDG targets, they all continue to move in the right direction, and the improvement in access to good quality water has been a great success – one in which everyone involved can take pride.

Increasingly, there is interest in expanding the role of groundwater in irrigation development. Irrigation holds the promise of increasing food production, raising nutritional standards, and generating additional income in rural areas.

Nevertheless, groundwater resources are finite. Groundwater systems are only sustainable as long as annual depletion, particularly during the dry season, does not exceed replenishment during the subsequent rainy season or two. Depletion of groundwater over long periods is very difficult to reverse and will threaten all activities that depend on its use.

## 1.2 THREATS TO GROUNDWATER-BASED DEVELOPMENT

With every successful campaign comes the risk of complacency. As countries near their MDG targets, it is easy to forget the threats to those accomplishments both in terms of sustaining gains and in reacting to external threats that might undermine those successes.

Sustaining the gains presents a major challenge. With tens of thousands of new water supply points scattered all over the rural landscape of West Africa, the challenge to continue to finance and manage long-term repair and replacement of that infrastructure will become greater. While many donors, particularly smaller NGOs, like to build something new, they have a smaller appetite for the more mundane and less attractive task of operations and maintenance. Large areas of the region remain very poor with little or no capital resources and simply do not generate sufficient income to pay for the new infrastructure they have received. Insofar as governments do have those resources, groundwater

development begs the question as to who will pay for the recurrent operations and maintenance (O&M) to sustain the new water supply infrastructure.

In a somewhat longer time frame, there is growing concern that the gains made during the past two or three decades could be undermined by three substantial threats: climate change, population growth, and modern technology. It remains unclear whether there is sufficient management capacity to address these threats as well as to find acceptable and practical ways to sustain the gains made so far.

### 1.2.1 Climate

While Global Climate Models (GCMs) agree on a long-term increase in temperature on the order of 2.5 – 3.5 °C by the end of the 21<sup>st</sup> century, they strongly disagree on future precipitation. Other characteristics of climate, such as the onset and length of the rainy season and the distribution of dry spells within the season — which are critical for climate-sensitive sectors such as agriculture — are even more difficult to project with confidence. There is some indication that the rainy season in the Sahelian region might be delayed in the future and that extreme rainfall events, such as droughts and floods, might become more frequent (ARCC, 2013).

### 1.2.2 Population

West Africa continues to face a major population increase in rural areas. With annual growth rates of about 3 percent, the population will continue to double approximately every 25 years. If we look into the not too distant future, say the year 2040, there will be twice as many people requiring potable water than there are at present. Some will migrate to urban areas, creating a different water supply challenge, but many will remain in rural areas. The impacts of population change vary greatly from one location to another. In dry locations, existing wells do not meet basic human requirements and do not have capacity to support more people. In other locations, groundwater for existing uses (domestic water supply and livestock) may be sufficient to meet population growth but may not have capacity to cope with increased intensification of groundwater use.

### 1.2.3 Technology

The third threat to sustainability has not yet become a major topic for discussion, although its importance is gaining recognition. This threat is technology, and particularly the technology to pump useful volumes of groundwater from deeper and deeper parts of aquifers. Whenever the rate of groundwater extraction exceeds annual recharge into an aquifer, the resource use becomes unsustainable.

Traditional technology to access groundwater relied on ropes and buckets in deep wells. The development of tubewell technology with hand pumps allowed people to raise water more efficiently so that people could obtain sufficient water to meet both drinking and hygiene needs. The vast majority of rural water supply infrastructure is based on manual lifting of water, which has become a self-regulating mechanism; the rate at which groundwater can be lifted to the surface is limited by the physical capacity of the people using that well or borehole.

This self-regulating mechanism disappears as soon as people get access to external power sources. The source of the power does not matter – wind, diesel fuel, electricity, and sunshine all allow people to lift more water more quickly from increasing depths. This access allows people to consider additional uses for water, notably irrigation. Irrigated agriculture has the potential to increase food production, improve nutrition, and generate additional income for rural communities.

As long as the rate of extraction does not exceed the rate of replenishment, then there is no threat to sustainability. However, when it does exceed replenishment, groundwater becomes one of many examples of the “tragedy of the commons,” in which individuals or small groups of individuals can independently access and benefit from a common resource to the point where the resource is depleted and everyone suffers. Rural areas in West Africa face this issue not only in terms of access to groundwater, but also for grazing, forests, fishing, wildlife, soil fertility, and so on.

### **I.3 PURPOSE OF THE STUDY**

The purpose of this study is to inform region-wide programming in West Africa by assessing and prioritizing opportunities to improve the efficiency and sustainability of groundwater within the context of likely changes in climatic conditions. More specifically, the objectives of the report are to:

- develop an understanding from available evidence of climate change impacts on groundwater supply and demand in West Africa;
- identify the aquifers most vulnerable to climate change in West Africa;
- propose options regarding which uses of groundwater are sustainable and the best ways to promote efficient and sustainable use of groundwater in West Africa;
- develop an initial action plan with options for fieldwork that will help support a program of sustainable and efficient groundwater use, including development and use of data-driven decision support systems at local, regional, and national levels; and
- provide a guide for future pathways to establish governance systems that support the overall concept of integrated water management.

### **I.4 SCOPE OF THE STUDY**

This paper is not intended to be a comprehensive review of all aspects of the impacts of climate change on groundwater management in West Africa. Instead, it focuses on issues of groundwater development in rural areas as well as the next steps in maintaining and exploiting groundwater resources in a sustainable manner in the light of the potential threats of climate change, population growth, and technology.

As such, this paper does not address in detail issues related to groundwater in an urban context. This focus does not imply that urban issues are not important; more than 50 percent of the population of West Africa lives in urban areas, most of which rely on groundwater as the primary source of drinking water. Urban issues are closely related to investment strategies and capacities, with an emphasis on deep wells, pipeline development for water transfers, and a water distribution network to homes or standpipes. Urban water supply requires specific technical and managerial skills provided by large water utilities, a significant contrast to the myriad small, locally managed independent water sources typical of most rural areas. Chapter 2 looks at key elements of groundwater hydrology, because understanding the different types of groundwater resources and their renewal in West Africa is essential to seeking sustainable development solutions.

Climate change is addressed in Chapter 3, which describes how anticipated changes in both rainfall and temperature may affect natural renewal of groundwater resources and the way in which people may affect groundwater resources by modifying their behavior in response to those changes in climate.

Chapter 4 looks at current technologies for exploiting groundwater in rural areas as well as the opportunities and threats associated with change and innovation in water-lifting technology.

Chapter 5 addresses governance issues for sustainable groundwater use. There are opportunities for improved management at all levels of society: at the international, national, district, and individual community levels. Each level calls for different interventions that require different skills and approaches. This chapter focuses primarily on needs at the district and village level rather than addressing the policy and research components of the national level.

Chapter 6 focuses on potential opportunities for intervention, specifically from the perspective of USAID and its programmed support for rural populations in West Africa in the context of IWRM. The Appendices present some suggestions for action to support these opportunities.

# 2.0 GROUNDWATER IN WEST AFRICA

In determining suitable strategies for countering the effects of climate change, it is important to have a clear idea of the hydrogeologic situation in any area targeted for intervention. Some areas have relatively shallow groundwater – less than 50 meters below the ground surface, which permits the use of a wide range of lifting technologies. In other locations, groundwater may be several hundred meters below the surface, requiring some form of a motor pump to lift water.

This interaction between the physical setting of groundwater on one hand, and the capacity to utilize this water through different lifting and pumping technologies on the other provides an intriguing set of management problems.

This chapter provides a brief overview of the hydrogeologic setting in West Africa and looks at key issues of groundwater hydrology that determine the extent to which groundwater can be used as a valuable resource in the battle against climate change. The following chapter looks at how climate change may affect the basin physical attributes of groundwater and aquifer recharge, while Chapter 4 looks at anthropogenic impacts on groundwater resources as a result of the evolution of different pumping and lifting technologies.

Box 2.1 provides a few definitions of different aspects of groundwater hydrology for reference.

## 2.1 HYDROGEOLOGIC SETTING

In planning effective utilization of groundwater resources, it is important to understand the overall hydrogeologic setting of any particular area within the West African context. Too often, generalizations are made about groundwater without clear reference to hydrogeology, which may result in misunderstandings about potential and risk.

For the most part, West Africa can be divided into four main hydrogeologic zones with specific groundwater characteristics. The distribution of these zones can be seen in Figure 1; brown areas have low groundwater recharge potential, and blue areas have high groundwater recharge potential. However, high potential recharge does not automatically mean there is a lot of readily available groundwater – that depends on annual rainfall and depth to the aquifer. A brief description of each hydrogeological zone follows.

## BOX 2.1

### *Basic definitions*

**Aquifer:** an underground layer of water-bearing permeable rock or unconsolidated materials (gravel, sand, or silt) from which groundwater can be extracted. Aquifers may be continuous, in which case water can flow laterally for substantial distances; or discontinuous, in which water is in unconnected pockets.

**Groundwater Basin:** an area underlain by permeable materials capable of furnishing a significant supply of groundwater to wells or of storing a significant amount of water. One basin can have multiple aquifers.

**Watershed:** an area of land where all the water that is beneath it or that drains from it leads to a single outlet.

**Discharge:** the volume or rate of water flow, including any suspended solids (e.g., sediment) transported through a given cross-sectional area.

**Recharge:** a hydrologic process where water moves downward from surface water to replenish groundwater. Recharge can be both natural and augmented by human activities.


**Transmissivity:** the rate at which water flows through an aquifer.

**Yield or “Production”:** the amount of water that can be extracted from a water well or borehole in a given time period.

Figure 1, produced by the German Federal Institute for Geoscience and Natural Resources (BGR) is based on potential groundwater recharge. Dark and light brown areas represent shallow and local water sources overlying basement rocks, while blue areas represent major sedimentary basins that have large aquifers. The British Geological Society (BGS) produced more complex maps that are available in Annex A but do not provide a basic visual impression of hydrogeological variation in West Africa.

High recharge rates, indicated in various shades of blue, are sedimentary basins with porous rocks that allow relatively high rates of recharge of aquifers as well as higher levels of water yields from wells and boreholes. The basement complexes have generally low rates of recharge because rocks are less porous, and water yields of boreholes and wells are low.

**FIGURE I. BASIC HYDROGEOLOGICAL RESOURCES OF WEST AFRICA**

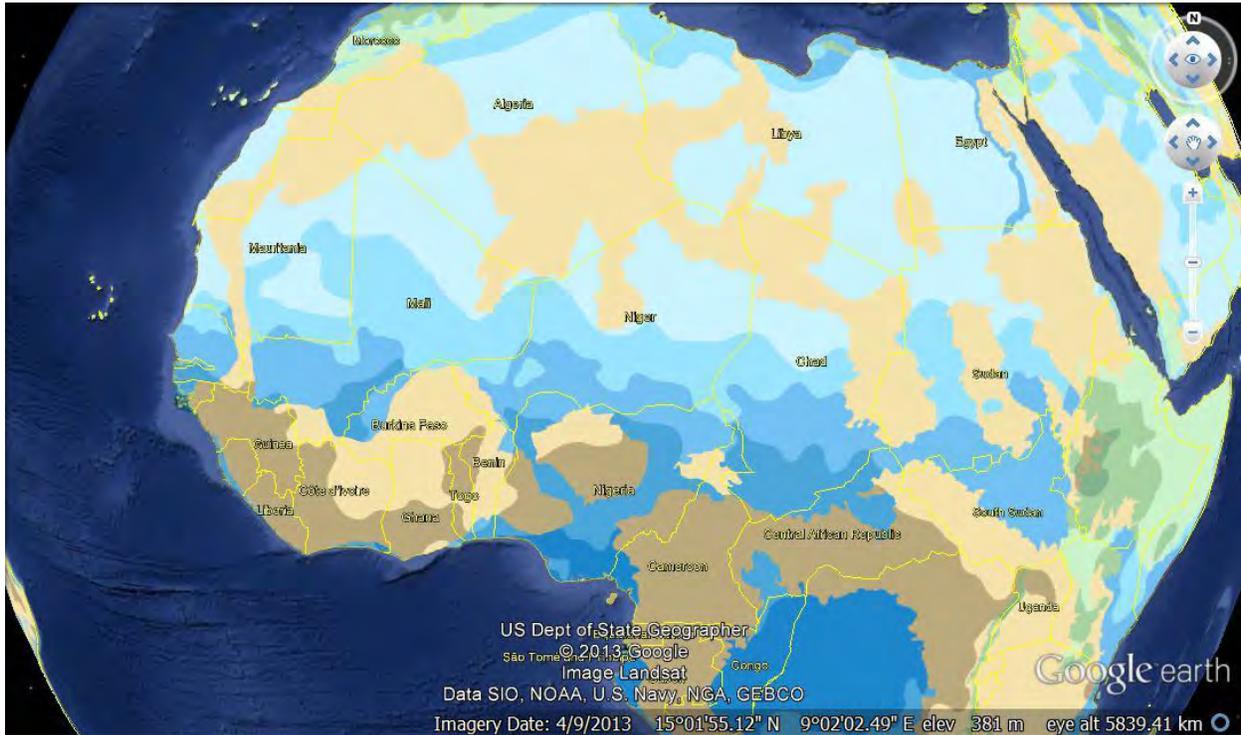

Source: *World-wide Hydrogeological Mapping and Assessment Programme (WHYMAP)*, (C) BGR Hannover, and United Nations Educational Scientific and Cultural Organization (UNESCO) Paris, 2006. The figure was produced using a Keyhole Markup Language (KML) file adapted for Google Earth.

- MAJOR GROUNDWATER BASIN
  - very high recharge (> 300 mm/year)
  - high recharge (100 - 300 mm/year)
  - medium recharge (20 - 100 mm/year)
  - low recharge (2 - 20 mm/year)
  - very low recharge (< 2 mm/year)
- COMPLEX HYDROGEOLOGICAL STRUCTURE
  - very high recharge (> 300 mm/year)
  - high recharge (100 - 300 mm/year)
  - medium recharge (20 - 100 mm/year)
  - low - very low recharge (< 20 mm/year)
- LOCAL AND SHALLOW AQUIFERS
  - very high - high recharge (> 100 mm/year)
  - medium - very low recharge (< 100 mm/year)

### 2.1.1 Basement bedrock zones

A significant portion of West Africa is underlain by very old (1.5-3 billion-years-old), mostly pre-Cambrian granites, gneisses, schists, and other crystalline rocks formed by successive periods of metamorphism. They form the core of the main West African highlands in Guinea, Liberia, Sierra Leone, Guinea Bissau, and parts of Cote d'Ivoire, including the Fouta Djallon highlands that are often referred to as the “water tower” of West Africa. Less mountainous zones, often in the form of peneplains with isolated rocks and hills, dominate Ghana, Burkina Faso, Togo, Benin, and much of Core d'Ivoire. There are wide areas where the basement rocks are covered by lateritic deposits and sediments.

Further east, the pre-Cambrian basement forms the base of the central Nigeria plateau and much of Cameroun, although the highest parts of Cameroun are the result of more recent volcanism associated with tectonic movements in the Tertiary era, some 70 million years ago.

None of the rocks found in the basement complex make good aquifers. The rocks are largely impervious, so water cannot pass through them, and groundwater is only found in areas with a lot of cracks and fissures.

Exploitable quantities of groundwater in basement rocks are only found in fracture zones or in areas where there has been more extensive weathering that allowed water to move around in the rocks. These water resources are mostly discontinuous, meaning that water is found in individual pockets or mini-basins, and there is no hydraulic connectivity between the water sources. As a result, it is possible to over-extract water in one location and have no material effect on neighboring locations. BGS (2008) refers to these as local and shallow aquifers.


Armed with good geological maps and satellite images, it is not too difficult to find groundwater in the basement rocks; however, the yield of wells is generally low – less than 5 liters per second. This yield is adequate to support rural water supply in dispersed villages, marginal to support more densely settled areas, and not suited to larger extractions for urban areas or intensive irrigation. Without good data on location of fracture zones, drilling for water is somewhat hit or miss, and success rates for wells will often be less than 50 percent.

### 2.1.2 Major Sedimentary Basins

Four main sedimentary basins in West Africa have been accumulating sediments for hundreds of millions of years as a result of erosion of the pre-Cambrian basement interspersed with marine and terrestrial sediments in the form of limestones, shales, and sandstones. The four basins are the Senegal-Gambia basin, the upper Niger basin that includes almost all of southern Mali and extends in western Burkina Faso, the lower Niger basin in southwest Niger that cuts through western Nigeria, and the Chad-Benue basin of Chad and east and central Nigeria.

These four basins cover a high percentage of the Sahelian zone in West Africa (Figure 2). The only other major river basin, the Volta, is almost exclusively underlain by the basement complex and has a different relationship between surface and groundwater resources.

**FIGURE 2. RIVER BASINS OF WEST AFRICA**

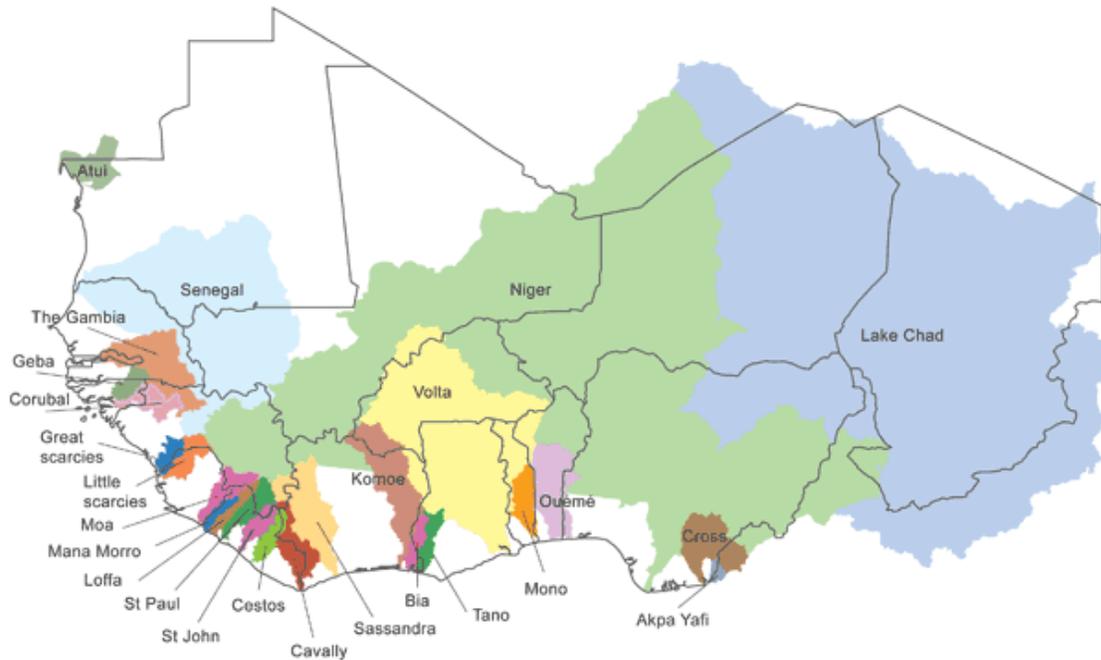

Source: *West Africa Gateway of Club du Sahel, 2011*

Coarser sedimentary rocks (sandstones, shales, and limestones) move vertically and horizontally and are porous, allowing water to pass directly into the rock itself. Clays, which are less porous, do hold water; however, the rate of flow through clay layers is much less than that through other sedimentary rocks. Clays may act as barriers to movement of groundwater.

The large sedimentary basins of West Africa have large areas of continuous aquifers that allow water to move laterally along one layer. There is a lot of vertical movement of water, unless layers of clay and fine-grained shale reduce vertical flow of groundwater in some locations. Aquifers are like underground sponges that have a capacity to hold a lot of water in spaces between individual rock particles and allow water to move either through gravity or differential hydraulic pressure. Coarse-grained alluvial sediments, sandstones, coarse shales, and limestones make the best aquifers, because water movement within them is easy. As a consequence, wells and boreholes have potentially high yields.

However, groundwater is not necessarily readily available. True aquifers may be several tens or hundreds of meters below the surface, making pumping an expensive proposition. Rural water supplies instead rely on shallow aquifers that impermeable sediments support and that are within reach of smaller pumping technologies.

### 2.1.3 Coastal Aquifers

Coastal aquifers are a special case. They are relatively recent water-bearing sediments formed through erosion in inland mountain areas, interspersed with marine sediments associated with periods of higher sea level. They are generally continuous aquifers, so extraction of water in one location can directly affect groundwater availability in other locations served by the same aquifer.

The freshwater in coastal aquifers normally floats on top of the denser saline groundwater that is connected to the sea, so there is a lens of fresh water available. However, if the thickness of the freshwater lens declines, either through excessive pumping or reduced streamflow as a result of climate change or diversion for irrigation, then the boundary between the freshwater lens and saline groundwater below will rise toward the surface. Wells that once pumped freshwater start to pump saline water and must be abandoned.

All major cities along the West African coastline face a threat of salinization of coastal aquifers through the dual threats of excessive extraction of fresh groundwater (it is relatively easy to sink boreholes into these sediments) and reduced streamflow into coastal areas. They also face serious issues of groundwater pollution from industry and human waste (UNEP, 2006).

Coastal aquifer management is more complex than regular aquifer management, because attention must be paid not only to rates of recharge and depletion but also to the movement of the boundary layer between freshwater and saline water within an aquifer.


Some aspects of coastal aquifer management that distinguish them from other aspects of groundwater management are discussed in section 5.3.2.

#### 2.1.4 Fossil Groundwater

Northern parts of West Africa have large water resources in the form of fossil groundwater, resulting from recharge of aquifers during wet periods during the last Ice Age. There are three such aquifers of economic importance.

Figure 3 shows that, for the most part, the major aquifers of West Africa are situated in the southern parts of the Sahara and adjacent parts of the Sahel, where mean average rainfall is less than 500 mm/year. The only significant exceptions to this pattern are found in Nigeria, where aquifers reach southward along the lower part of the Niger River and the Benue River, merging with the Niger delta at the coast.

**FIGURE 3. MAJOR AQUIFERS OF WEST AFRICA**

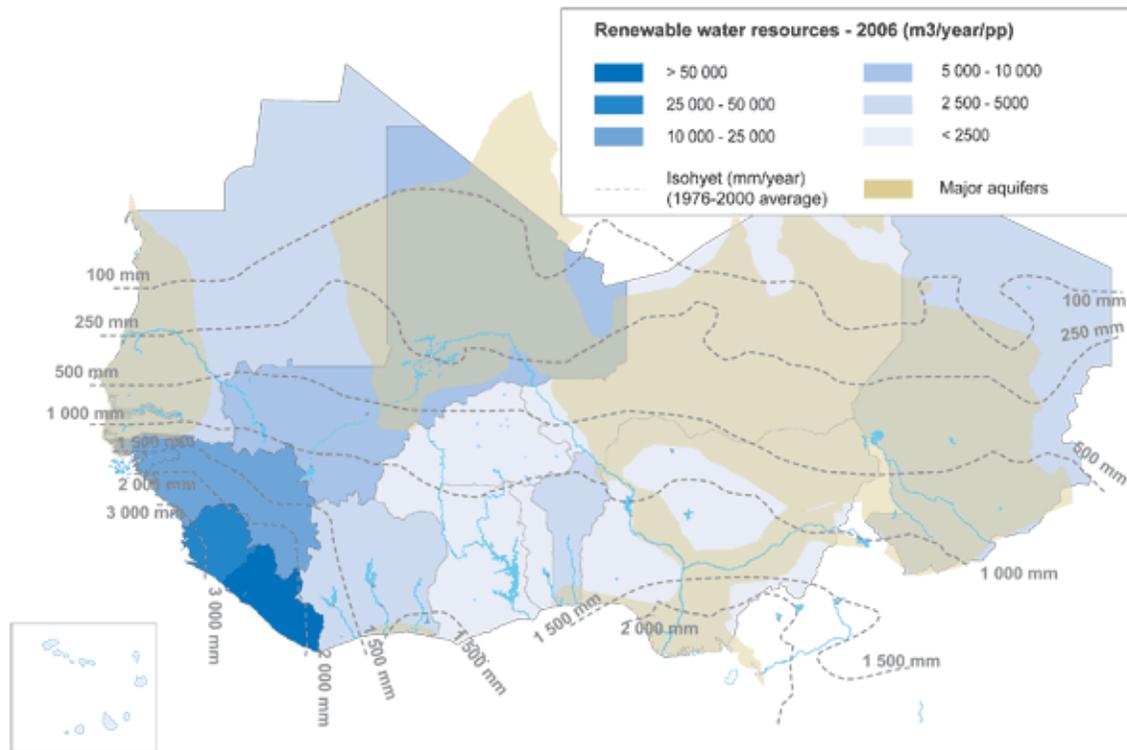

At first glance this pattern seems to suggest that there is enormous potential for using these aquifers for human economic activity (Table I). Indeed, parts of these aquifers already act as important water sources, but tapping this potential is not without significant physical, financial, and ecological risk. Fossil groundwater is by definition unsustainable and may have water quality issues — one estimate of volume of potable water in the Maastrichtian aquifer is 7,000 mm<sup>3</sup>, only 2 percent of the upper estimate of available water, due to high chloride and fluoride content (Kane et al., 2012). Exploitation of fossil aquifers requires expensive pumping installations both for drilling and for subsequent operation and maintenance. Subsidizing the cost of these water sources makes it unlikely that local populations can afford the operation and maintenance costs.

**TABLE I. FOSSIL AQUIFERS IN WEST AFRICA**

Countries	Aquifer	Area (km <sup>2</sup> )	Estimated Reserves (Mm <sup>3</sup> )	Extraction Rates (Mm <sup>3</sup> /a)
Mauritania, Senegal, Gambia	Maastrichtian	200,000	480,000 to 580,000	265
Mali, Niger, Nigeria	Iullemeden Multilayer Continental	500,000	250,000 to 2,000,000	225
Niger, Nigeria, Chad, Sudan, Cameroon, Libya	Chad Basin	600,000	170,000 to 350,000	225

Source: UNESCO, 2009

Further, and more ecologically complex, is the effect of pumping fossil groundwater into locations that have an ecological setting reflecting current day rainfall and land-use patterns. As early as 1983, the National Research Council (1983) recognized that the sinking of wells into fossil aquifers was enabling livestock to survive drought conditions because of augmented water supplies; however, livestock were starving to death because of a lack of commensurate grazing resources supported only by sporadic and declining rainfall. Section 5.3.1 further discusses the complex relationship between groundwater exploitation for large herds of livestock and the prevailing ecological resources at the land surface.

National strategies must depend heavily on the availability of groundwater in either continuous or discontinuous aquifers. Table 2 summarizes estimates of water by each type of aquifer in each country in West Africa. The influence of basement geology on the proportion of discontinuous aquifers in each country is very clear.

In first five countries in the region listed in Table 2 (Gambia, Niger, Senegal, Mali, and Mauritania) more than half of the country's land area is underlain by continuous aquifers; they fall within the Senegal and Niger River basins, which are dominated by sedimentary rocks. At least 25 percent of Nigeria falls into this same category within the Niger and Benue basins, as does some of Guinea Bissau.

Discontinuous aquifers that have much more limited potential for high-yield wells and boreholes dominated all of the other countries listed, with about half of Nigeria, because they are underlain by non-porous basement rocks.

This patterns reflects the distinctions in Figure 1 between high and low potential aquifer recharge.

**TABLE 2. AREA OF EACH AQUIFER TYPE AS A PROPORTION OF TOTAL LAND AREA BY COUNTRY IN WEST AFRICA**

Country	Land area (km <sup>2</sup> )	Continuous		Mixed		Discontinuous	
		(km <sup>2</sup> )	(%)	(km <sup>2</sup> )	(%)	(km <sup>2</sup> )	(%)
Gambia	11,295	9,372	83	1,920	17	-	-
Niger	1,267,000	836,220	66	329,420	26	101,360	8
Senegal	201,400	128,896	64	56,392	28	16,112	8
Mali	1,240,710	645,169	52	459,063	37	136,478	11
Mauritania	1,030,700	515,350	50	237,061	23	278,289	27
Guinea-Bissau	36,125	14,450	40	21,675	60	-	-
Nigeria	923,768	230,942	25	138,565	15	554,261	60
Sierra Leone	71,740	8,609	12	7,147	10	55,957	78
Benin	112,622	11,262	10	13,515	12	87,845	78
Togo	56,000	4,480	8	8,960	16	42,560	76
Ghana	238,537	14,312	6	95,415	40	128,810	54
Cote d'Ivoire	322,463	12,899	4	-	-	309,564	96
Burkina Faso	274,200	10,968	4	32,904	12	230,328	84

Country	Land	Continuous		Mixed		Discontinuous	
Liberia	111,500	2,230	2	-	-	109,270	98
Guinea	245,857	2,459	1	66,381	27	177,017	72
Cape Verde	4,033	-	-	-	-	4,033	100

Source: Adapted from Diagana, 1994


## 2.2 GROUNDWATER HYDROLOGY

The usefulness of an aquifer for economic purposes depends on several factors, many of which are directly affected by human activities. Without knowing something about each of these factors, it is difficult to assess the real potential of groundwater at a specific location. To make matters somewhat more complicated, local variations in geology and topography may lead to quite large variations in groundwater potential over relatively short distances. This is particularly true for discontinuous aquifers.

One critical aspect of groundwater hydrology is that it is directly affected by both natural physical conditions and by anthropogenic factors. It is almost impossible to separate out the two sets of influences, as is discussed in Chapter 3, which looks at the interactions between climate change and groundwater. Discussion in this section focuses on the most important aspects of groundwater hydrology that need to be understood in order to effectively manage groundwater resources.

Figure 4 schematically represents different ways in which groundwater can be pumped or lifted to the surface. The different well types, which are described in more detail in Chapter 4, provide significantly different threats to groundwater sustainability. Box 2.1 above provides some basic definitions to ensure that there is no confusion over groundwater terminology in the remainder of this paper.

**FIGURE 4. DIFFERENT TYPES OF WELLS USED IN TAPPING GROUNDWATER RESOURCES**

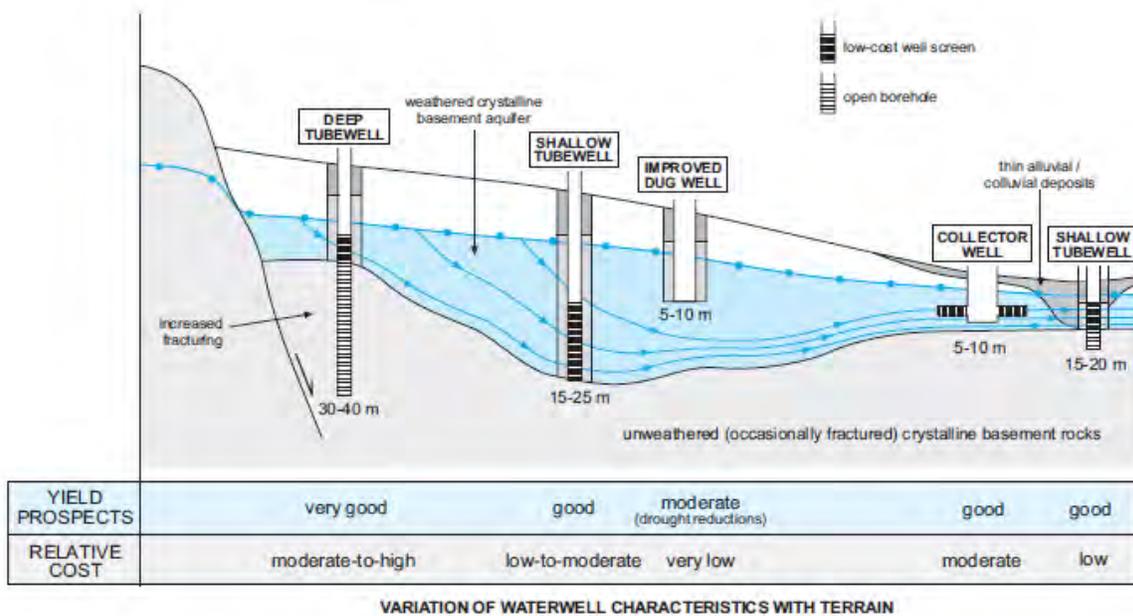

Source: Tuinoff et al., 2011

### 2.2.1 Yield

Yield represents the flow rate of water that can be obtained from a well. It is determined in part by the water-holding capacity of sediments near the well, including porosity and fracturing; in part by the transmissivity of the aquifer that determines the rate of flow of groundwater within the aquifer; and in part by the distance the well is sunk into the aquifer itself.

It is difficult to predict yield from any given borehole or well because of local differences in these variables. Dug wells generally have low yields, because it is difficult to sink the well very deep into the saturated portion of the aquifer. However, dug wells can be deepened during dry periods.

### 2.2.2 Recharge

Groundwater can be recharged through one of three main mechanisms: rainfall percolating through the soil into the top of the aquifer, flooding of rivers and lakes during the wet season, and long-distance horizontal movement along an aquifer from areas of higher ground with higher rainfall to lower-lying areas.

These natural processes can be amplified through proper groundwater supply management, as discussed in Chapter 6.2. Groundwater supply management helps to increase the total amount of water percolating into aquifers, either through soil conservation techniques at the land surface or the construction of dams and sand dams that trap water that would otherwise flow into rivers.

Theoretically, aquifers can be artificially recharged by pumping downwards into specially designed wells, but this very energy dependent option is not economically viable for West Africa.

The percentage of total rainfall that actually percolates through the soil to recharge aquifers is surprisingly small. When water reaches the soil surface, it can either evaporate back to the atmosphere, run off horizontally toward lower areas (augmenting lakes and rivers), or be used by plants as transpiration from the root zone. Only the residual amount will percolate through the root zone and start to flow vertically toward the aquifer.

The relative proportions of surface runoff and groundwater recharge heavily depend on the nature of individual rainfall events and are less influenced by total annual rainfall. Intensive rainfall events have a higher proportion of surface runoff; climate change models indicate that there is a likelihood of an increase in the number of high intensity storms. However, the impact of changing rainfall patterns on recharge also relates to the storage capacity of soils and aquifers. If the aquifer totally fills up during the wet season such that no more rain water can be stored and must become part of surface runoff, then there is no significant impact on water availability in the dry season. The change in depth to groundwater is more important in understanding the sustainability of groundwater exploitation. Sections 2.3 and 2.4 below address this issue in more detail.

It is immediately clear that anthropogenic actions at the land surface directly affect groundwater recharge. The effects of overgrazing, lack of fallowing, clearance of forests, and other negative impacts on vegetative cover all lead to reduced infiltration of rainfall and a reduction in water recharging the aquifer. Destruction of vegetation that leads to soil crusting and increases the speed of runoff leads to soil erosion and flash flooding, allowing more rainfall to reach rivers but making it less available for groundwater recharge. Destruction of vegetation also increases evaporation from the soil surface.

Most watershed management programs are based on the principle of increasing infiltration but slowing down runoff using mulching, terraces, bunds, vegetation, and small catch basins to keep water on the soil long enough for it to infiltrate. While good vegetation cover means increased transpiration, there is a far greater increase in percolation toward the aquifer because of reduced runoff and reduced surface

evaporation. These activities can be broadly classified as groundwater supply management, which is discussed further in Chapter 6.3

At a larger scale, it is more difficult to manage groundwater recharge. Increasingly, West Africa faces the risk of moving from “open” basins to “closed” basins, so that almost all useful flow in a river is diverted for economic purposes before it reaches the sea. This shift has a direct impact on coastal aquifers, because there is less surplus water for recharge near the coast; it also affects water levels in rivers in upstream areas. High fluctuations in water surface elevation enhance recharge in the wet season, because water infiltrates into river banks and flooded riverine areas. Reduction in water levels due to wet season water storage in reservoirs reduces groundwater recharge.

### 2.2.3 Overall storage capacity of an aquifer

Total aquifer resources are determined by the thickness of the water-bearing strata, the degree of connectivity of the aquifer, and the regional slope of aquifers into major sedimentary basins. In most sedimentary basins in West Africa, the total resources far exceed our capacity to extract them;<sup>1</sup> however, if there is sufficient capital available to invest in large-scale pumping, depletion becomes a significant threat, particularly where fossil groundwater reserves are being mined. Until recently, Libya was the only country close to West Africa with the financial wherewithal to invest in such major schemes. Similar investments in West Africa are unlikely in the foreseeable future.

Pumping water from aquifers has its biggest impact at the edges of an aquifer and comparatively less impact in the center of a basin, because lowering of the water table in the center of a basin causes water to flow toward the center. Pumping from the edge of an aquifer will have a significantly greater impact but may not affect overall aquifer storage to any great extent.

Siting of wells within continuous aquifers is an important aspect of groundwater management to ensure that the overall impact on aquifer storage capacity is minimized.

Sustainability of groundwater within an aquifer is affected by the thickness of the aquifer itself and its depth below the ground surface. The large aquifers shown in Figure 3 have huge water resources because they are many hundreds of feet thick, and current rates of abstraction are low in comparison to the reserves. However, many smaller aquifers closer to the ground surface provide the source of much of the groundwater used for human activity.

If the rate of groundwater extraction does not match total annual recharge, then the system is stable and not threatened by depletion; however, accurate data on the extent, thickness, and water holding capacity of aquifers is incomplete. With limited information on actual pumping rates from each aquifer, it is not possible to make definitive statements about sustainability of groundwater use under present conditions. Using extrapolation, it is even less clear what the consequences of climate change may be.

---

<sup>1</sup> The history of the Ogallala aquifer in the high plains of the United States is one example of where large sections of an aquifer effectively have been drained dry; the water supply aquifer for the city of Sana'a in Yemen is almost fully depleted.

## 2.2.4 Depth to water table

The distance from the ground surface to the top of the saturated zone of the aquifer, i.e., the depth to water table, has a major impact on how water can be exploited and how much of it can be brought to the surface.

The relationship between depth to water table and the type of available water-lifting mechanism is critical to understanding the sustainability of groundwater resources as well as the economics of lifting water. This relationship is further discussed in Chapter 4.

Most countries have some form of groundwater monitoring program that collects data from observation wells and keeps the results in centralized databases. These data are patchy and do not always reflect the need for water table monitoring in areas particularly sensitive to groundwater depletion. The monitoring networks, normally underfunded by government, have not kept up with the pace of groundwater development during the past couple of decades.

When assessing how to effectively exploit groundwater resources, it is important to recognize that depth to water table is a dynamic, not static value. Shallow water tables, those used by most rural water supply installations, fluctuate annually in response to wet season recharge and dry season depletion. Depletion is a natural process caused by evapotranspiration at the ground surface and lateral flow toward rivers and lakes as their water levels drop. Just as anthropogenic factors affect recharge, the rate of depletion is also a combination of natural and manmade factors.

Measurement of the groundwater depth at the end of the rainy season is the best indicator of the health of the groundwater resource. If the aquifer fills by the end of the rainy season, then the underground reservoir is full and cannot store any more. The rate of decline of the water table can be predicted with accuracy once the rates of natural and anthropogenic depletion are known.

One example of variability of depth to water table over a several-year period is shown in Figure 5. The hydrographs show considerable sensitivity to both total rainfall during the wet season and the length of the rainy season, while the rate of drawdown of the water table is more or less uniform during each dry season. With careful analysis, it ought to be possible to determine the relative importance of total rainfall during the season; the length of the wet season; the number of individual rainfall events; and the importance of large, high intensity storms on the recharge of the aquifer. Unfortunately, the type of data shown in Figure 5 is very uncommon, and much more detailed data at the local level is required to determine the exact relationships between rainfall, depletion, and water table.<sup>2</sup>

Unless aquifers are completely drained, depth to groundwater has to be placed within the context of available lifting technology. Once groundwater falls below the depth limit of installed lifting devices, the groundwater becomes inaccessible. This could be at 6 meters for some types of pumps, or hundreds of meters for others. Interpretation of the importance of depth to water table is therefore a complex parameter, not a simple measurement.


A clear indication of groundwater stress comes when people must deepen their wells to continue to obtain water later in the dry season. Deepening wells is not an easy task; hand-dug wells have to be more or less dry before people can be lowered down the well shaft, while bore-hole deepening requires

---

<sup>2</sup> Given that these data come from a USAID program, it should be possible to request that involved researchers check if their data can be further analyzed to better quantify these relationships.

access to drilling machines. The stress comes about not because the aquifer is necessarily running dry, but because the available technology is not enough to raise water from the increased depth.

**FIGURE 5. HYDROGRAPHS FOR TWO WATERHOLES IN BANI DISTRICT, 1998–2010**

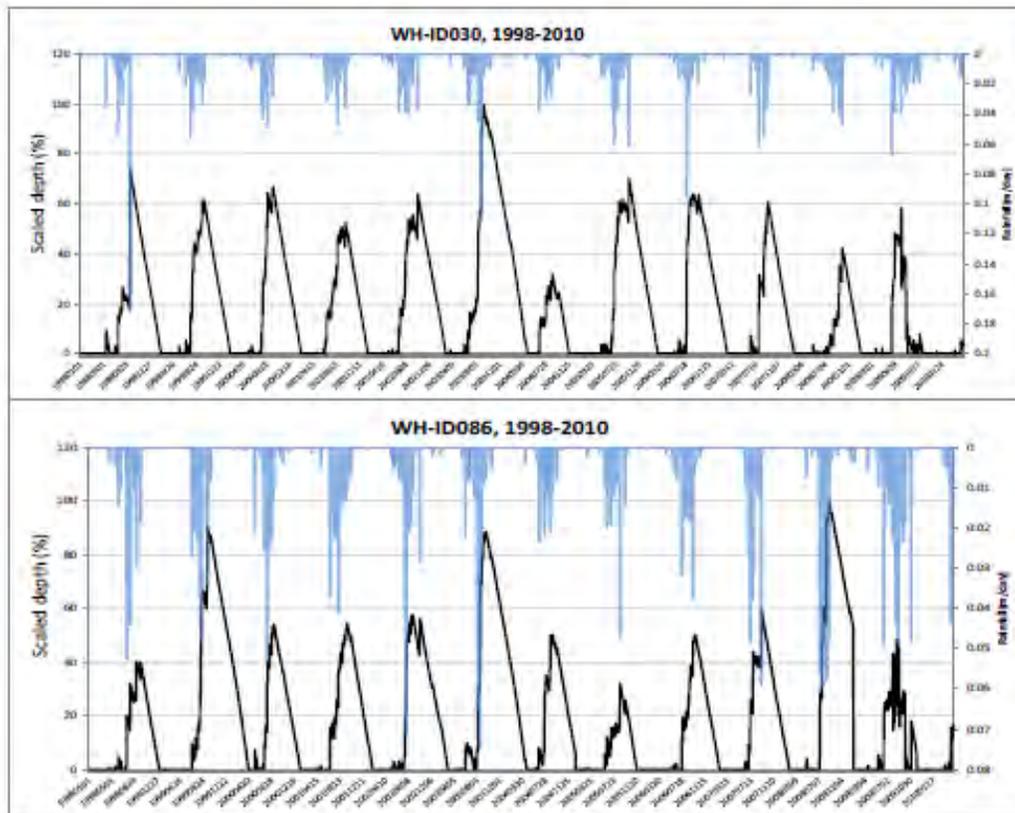

Source: MLPI Annual Report, 2012

### 2.2.5 Water quality

Issues of water quality in West Africa have been neglected largely because of the pressure to provide potable water to rural communities, although all countries in the region have established water quality guidelines normally based on World Health Organization (WHO) standards and subject to local variations. The capacity of most countries to enforce water quality regulations is very limited. It is easier to get water samples for testing from large drilling rigs that have to be licensed by government, so larger boreholes are better regulated than smaller ones sunk by private sector organizations.

Some donors, including USAID, insist on water quality testing before a well or borehole is commissioned; however, in reality it is very difficult not to fix a pump on a well with marginally sub-standard water when the only other available water supply is a highly polluted surface water source. This issue may pose a genuine human dilemma: is it appropriate to allow people access to water that does not meet basic minimum standards when their only alternative is to continue to use water that is far below those minimum standards? USAID is currently reviewing its policy on ensuring safe water

supply and is preparing a revised draft set of guidelines for providing safe drinking water (Chris McGahey, personal communication).

The main water quality concerns focus on potable water. Water quality concerns for livestock and irrigation are minor, because there is no direct threat to human health. In collaboration with the British Geological Survey, WaterAid sponsored a series of groundwater quality reports for all countries in which it worked in the early 2000s. For West Africa, it included factsheets for Mali, Nigeria, and Ghana. All of these factsheets addressed nitrates, salinity, fluoride, iron, arsenic, iodine, and other trace elements based on available published materials. For the most part, groundwater throughout those countries normally met or exceeded WHO water quality guidelines; however, it was recognized that aquifers, particularly near larger cities, were at risk of pollution and bacterial contamination.

One specific issue relates to the capacity to test for the full range of considered parameters when determining the potability of groundwater. While most national and local laboratories have the capacity to test for common chemical and biological contaminants, they rarely have the capacity to conduct more complex and expensive tests for elements such as arsenic. A few donor programs have proceeded without these tests, sometimes with negative impacts on human health.

# 3.0 CLIMATE CHANGE AND GROUNDWATER

This chapter addresses two aspects of the relationship between climate change and groundwater. It starts with an overview of the impact of predicted climate changes on the dynamics of groundwater recharge and depletion. These impacts heavily rely on the GCMs used to predict temperature and precipitation changes during the next several decades.

The second section of this chapter examines different modeling efforts in West Africa that have tried to predict changes in groundwater recharge during the same time period. All modeling efforts face problems of data availability, scale, and timeframes. They also require prediction of groundwater use patterns, because it is impossible to separate out the direct impacts of climate change on groundwater from the indirect impacts of human responses to climate change that will affect both hydrological processes and will change demand for groundwater.

## 3.1 CLIMATE CHANGE IMPACTS ON GROUNDWATER

Assessing the impact of climate change on groundwater is complex and remains plagued by uncertainty. As indicated earlier in Chapter 2, it is quite difficult to distinguish changes in rainfall and temperature on groundwater from changes in groundwater conditions resulting from anthropogenic factors. Nevertheless, some overall generalizations can help understand the likely impacts at a regional level.


At a very broad level of generalization, predictions of the impact of climate change by itself on groundwater are not too bleak. In comparing population density with mean annual rainfall, most of the population of West Africa lives in areas with at least 500 mm of rainfall (Figure 6), so that demand for rural water supply using hand pumping technology should not be particularly threatened. However, if rainfall declines so that the critical belt lying between 200 mm and 500 mm of rain shifts southwards, then more densely populated parts of Mali, Niger, northern Nigeria, northern Cameroun, and southern Chad will fall into the threatened zone.

Rather than looking at the rainfall pattern, it is more instructive to look at overall water availability per capita to determine the relative priority of groundwater management programs. In addition to showing the location of major aquifers, Figure 3 also shows national-level data on per capita water availability. Countries with darker shades of blue have abundant water resources, primarily in surface water, and groundwater depletion is simply not an issue except in coastal aquifers. By contrast, the drier countries such as Ghana, Burkina Faso, Niger, and large parts of Nigeria have annual per capita water resources of less than 2500 m<sup>3</sup>/person, perilously close to the level of 1,750 m<sup>3</sup>/year that is when true water stress occurs. Given that there is wide spatial variability in access to water in those countries, local water stress is widespread.

These data include both surface and groundwater resources. While Figure 3 seems to indicate that intermediate countries such as Mali, Senegal, Mauritania, and Cameroun are not yet close to water stress, the reality is that if they discount the deeper fossil groundwater resources, they also are close to the cut-off point for water stress, and definitely so at the local level.

Rising temperatures will inevitably have a negative impact on both recharge of aquifers and on overall storage. Increased temperatures lead to high evaporation of water from the soil surface, so there is less water available to percolate into the soil. Up to a certain limit, increased temperatures lead to increased transpiration by plants until temperatures reach a level where stomata close to minimize moisture stress within the plant. Natural vegetation is generally less subject to transpiration stress than crops.

**FIGURE 6. MEAN ANNUAL RAINFALL AND POPULATION DENSITY IN WEST AFRICA**

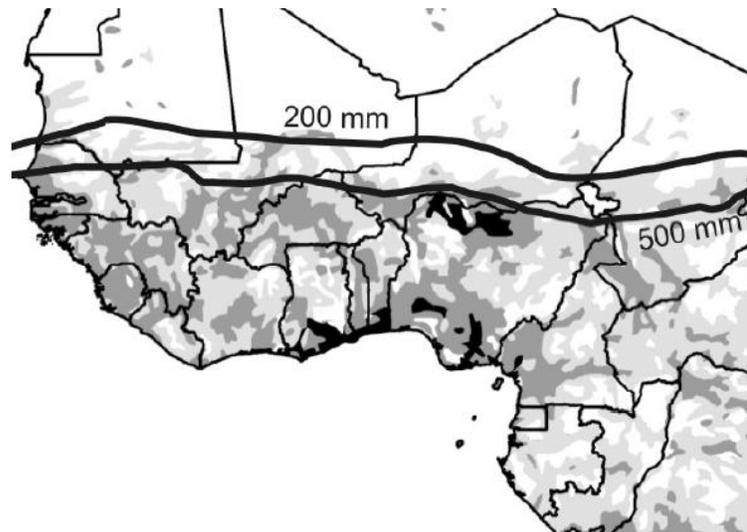

*Source: MacDonald et al., 2009*

Decreasing rainfall will mean less water for percolation into the root zone and eventually for interflow into the top of aquifers. Not only by total rainfall but also the nature of individual rainfall events greatly influence groundwater recharge. High intensity events are less effective at recharging groundwater resources than medium intensity, longer-duration storms; during periods of high intensity rainfall, the rate of rainfall exceeds the infiltration capacity of the upper part of the soil, resulting in a much higher rate of surface runoff. This surface runoff in turn leads to flash flooding that spreads excess rainfall over a wide area, with more opportunities for evaporation from the land surface after the storm has ended.<sup>3</sup>

It also has been inferred that medium intensity rainfall events contribute more to recharge than either high intensity rainfall or a period of low intensity rainfall (Carter & Parker, 2009). Lebel et al. (2009) concluded that for roughly the same annual rainfall, the amount of deep infiltration recharging the aquifer beneath a 5000 km<sup>2</sup> catchment was four times larger in 2004 than in 2005 (Lebel et al., 2009). Occurrence of medium intensity rainfall with a longer time period or higher frequency in 2004 is the probable reason for this higher recharge.


The various global climate change models are in fairly close agreement about likely temperature rises but show more varied results when it comes to rainfall (Figure 7). Given that these results are averages across the Sahelian zone, and given that the results do not take into account changes in rainfall intensity or changes in groundwater exploitation, it is hard to make more than generalized statements about what

---

<sup>3</sup> Flash flooding is a thin layer of surface water that quickly dissipates, and is completely different from annual flooding caused by overflow of rivers that is long-term, persistent, and recharges aquifers.

the long-term impact may be. For example, global climate change appears to increase the likelihood of extreme weather and climate events such as droughts, floods, heat waves, and stronger storms (Braman et al., 2013).

**FIGURE 7. PREDICTED RAINFALL AND TEMPERATURES IN THE SAHELIAN REGION IN THE 21<sup>ST</sup> CENTURY.**

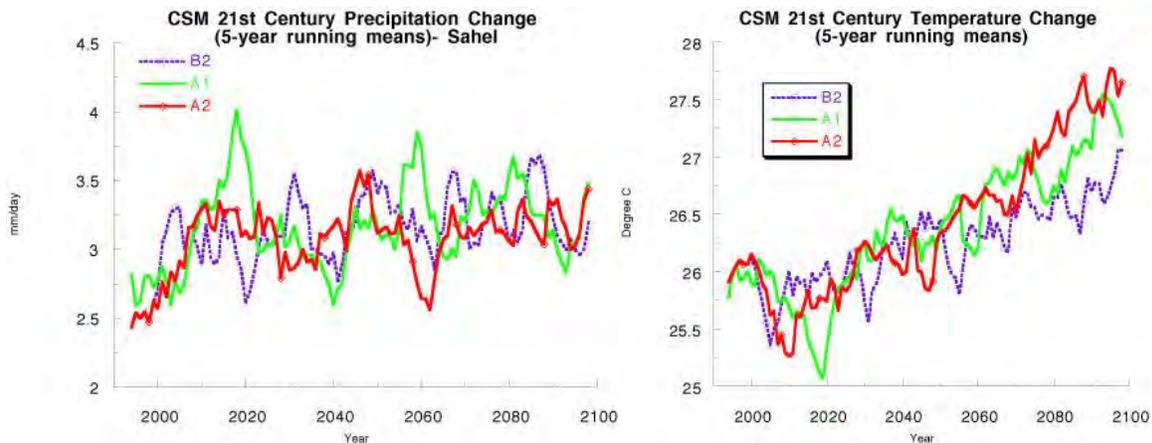


Source: Jenkins et al., 2004

The ultimate effects of climate change on the distribution of water in West Africa are highly uncertain but potentially of great significance for some parts of West Africa, such as the coastal areas. Climate models are still unable to provide a reliable estimate of the intensity and frequency of extreme events. The recent International Panel on Climate Change (IPCC) report underlines that West Africa is a region in which the uncertainty of the climate scenarios is large; some GCMs anticipate increased rainfall over the Sahel at the end of the 21st century, while others predict a lasting and more intense drought. Regardless, climate change is expected to affect groundwater quantitatively and qualitatively on both spatial and temporal scales (Goulden et al., 2008).

Using global scale models to assess vulnerability of groundwater to the impact of climate change is useful only up to a certain point. Data are either gridded at wide intervals, or assessed in terms of countries. For example, the left hand map in Figure 8 shows ratio of groundwater extractions to total water extractions (red colors have the highest ratio of groundwater), while the right shows a general sensitivity index (Red colors show locations where groundwater is considered most vulnerable to the impacts of climate change). Ghana, Senegal and Mali show more positive data than most other countries in West Africa, but this masks large internal differences within those countries depending on whether local populations have access to water from major rivers or are entirely dependent on local groundwater.

While global or national level data sets are helpful for policy makers concerned with long term investments in the water sector, they tell us nothing about the groundwater conditions at any given location. For more detailed understanding of groundwater availability and impact of climate change we need a combination of groundwater data and modeling approaches.

**FIGURE 8. VULNERABILITY TO CLIMATE CHANGE IMPACT ON GROUNDWATER**

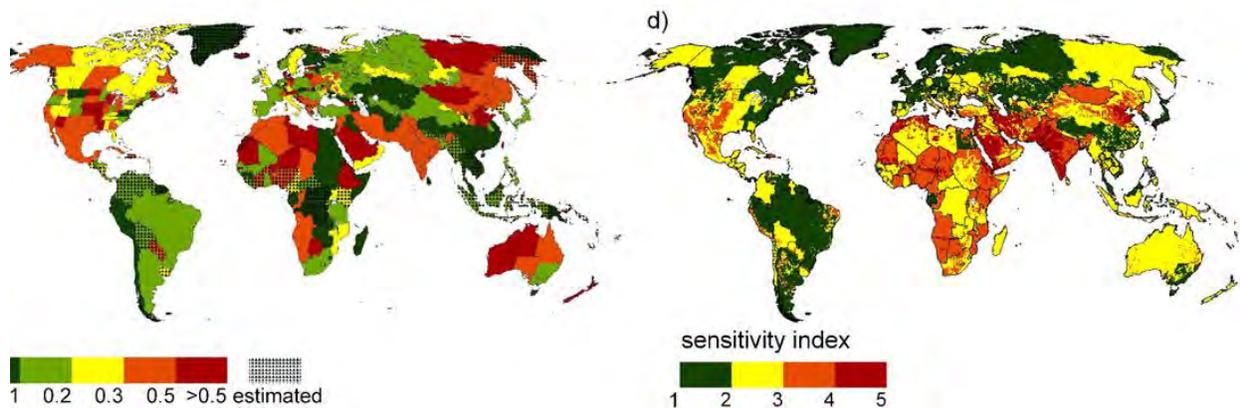

Source: Döll, 2008

### **3.2 MODELLING THE IMPACT OF CLIMATE CHANGE ON GROUNDWATER**

There have been several efforts to model the impact of climate change on groundwater in West Africa based on more site-specific information. These approaches all face the same basic problem: a lack of reliable data for aquifers that stretch back sufficient time to make modeling results meaningful.


The paper is not intended to give a full review of all model efforts; it merely highlights three such studies to illustrate the different approaches and overall comparison of the results. One factor of importance is the overall scale of the modeling approach, and another is the type of model approach used.

#### **3.2.1 AMMA-CATCH ([www.amma-catch.org](http://www.amma-catch.org))**

The African Monsoon Multidisciplinary Analysis (AMMA)-*Couplage de l'Atmosphère Tropicale et du Cycle Hydrologique* (CATCH) project is an international research effort to study in detail hydrological processes in three West African countries (Niger, Benin, and Mali). It relies on a network of scientists in France, the U.K., the United States, and Africa, with funding primarily from the U.K. The approach is multi-scale, with three meso-scale sites ranging from 10,000 – 30,000 km<sup>2</sup>, a few “supersites” of a few hundred km<sup>2</sup> for more detailed measurements, and a couple of very intensively monitored mini-catchments of a few km<sup>2</sup>. For the most part, the adopted modeling used a water balance approach that was calibrated using the detailed field observations.

While much of the work focuses on atmospheric-soil-plant relationships, some studies have modeled groundwater fluctuations in response to changing rainfall conditions. Among the wealth of information provided by the AMMA website studies, some of the more intriguing results come from the 5,600 km<sup>2</sup> Kori-Dantindou catchment in western Niger. Data collected between 1992 and 2005 show there is almost no direct correlation between total annual rainfall and the percentage of rainfall that ends up as groundwater (Figure 9).

**FIGURE 9. GROUNDWATER STORAGE VERSUS ANNUAL RAINFALL FOR THE KORIDANTINDOU CATCHMENT, NIGER (5600 KM<sup>2</sup>) FROM 1992 TO 2005**

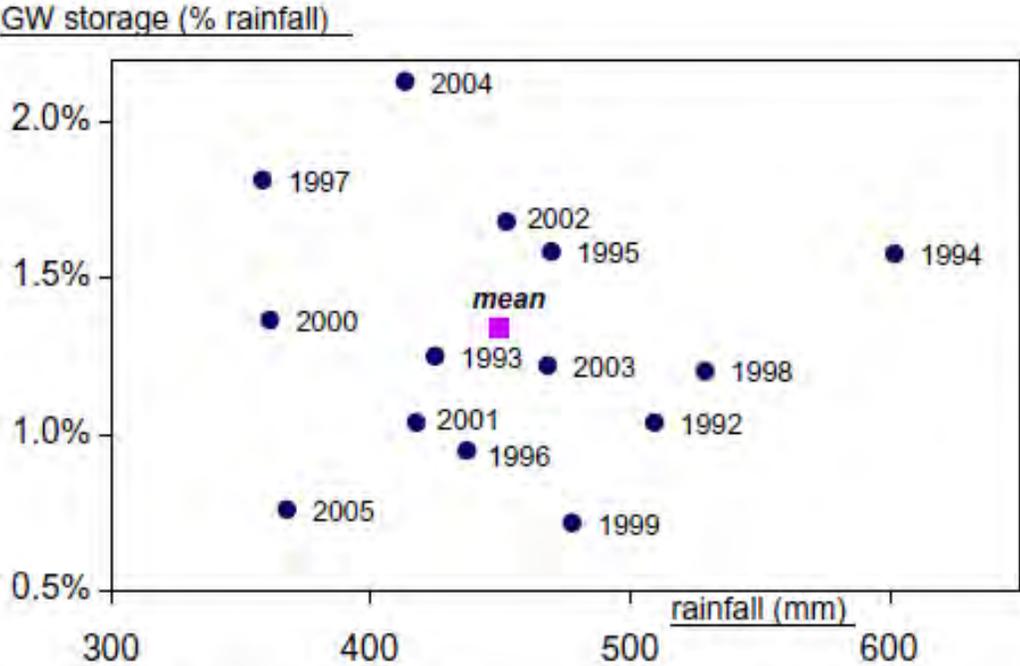

Source: Lebel et al., 2009

The reason for this apparent anomaly is most likely that the characteristics of individual rain events were sufficiently different in different years and resulted in a different ratio between surface runoff and infiltration. Years when there was a higher percentage of groundwater recharge had more medium intensity storms (allowing more water to infiltrate), while years with low recharge had more storms with high intensity rainfall.

The importance of these results are two-fold. First, it is very expensive to collect local-level data on hydrological conditions including groundwater levels, which makes this type of detailed research impossible to do over wider areas. Second, there is enormous local variation in rates of rainfall, runoff, and infiltration over quite small areas, so there is inevitable uncertainty when scaling up from such field-level studies and models.

**3.2.2 Desert Research Institute in Mali**

Using modeling at a somewhat larger scale, Desert Research Institute (DRI) looked at the likely relationships between groundwater, climate change and population growth (Lutz et al., 2011). The project site was 14,376 km<sup>2</sup> in the Bani River catchment in south-central Mali, undertaken as part of the Rural Water Project that the Conrad N. Hilton Foundation funded as part of WAWI.

Using data from existing wells, including wells sunk as part of the water supply program itself, the study estimated current levels of water extraction in rural communities and estimated recharge into the aquifer. It then adopted a scenario approach that predicted changes into the future by estimating demand for drinking water up to the year 2040, and the introduction of additional demand for groundwater.

Four assumptions about water demand patterns were used. In Scenario 1, demand was primarily for domestic consumption with no change in rainfall. Scenario 2 increased consumption to include some pumping for irrigation but with no change in rainfall. Scenario 3 increased consumption to include some pumping for irrigation and reduced rainfall by 20 percent. Scenario 4 had variable annual rainfall with reductions ranging from 0-20 percent together with increased demand.

The results are very different for the different scenarios (Table 3). The implications are that as long as groundwater is used for hand-pumped domestic water use only, then there should be little or no impact of overall groundwater resources if population doubles by 2040, because the groundwater demand would only increase to 0.55 percent of total rainfall. However, as soon as demand for other uses of groundwater increases (primarily for agriculture and small industry), the percentage of rainfall required to recharge groundwater increases to greater than 3 percent and reaches almost 4 percent if rainfall decreases by 20 percent (Scenario 3). For this reason, Figure 10 shows an increasing drawdown of groundwater in larger urban areas and where population density is higher.

**TABLE 3. SUMMARY OF THE FOUR MODEL SCENARIOS**


Scenario	Population	Consumption	Precipitation	Extraction	
	(M)	l/p/day	(mm)	Mm3	% of rainfall
0 Present Conditions	0.59	90	505	23.1	0.32%
1 Population doubles	1.18	90	505	39.7	0.55%
2 Agriculture & Industry	1.18	695	505	222	3.10%
3 Drying trend	1.18	695	405	222	3.80%
4 Variable Precipitation	1.18	695	405– 540	222	3.0-3.8%

Source: Adapted from Lutz et al., 2011

The results heavily depend on assumptions of increased per capita water use; however, the trends are already there, because without increased per capita water use, particularly for small-scale irrigation, the rural economies of such areas will continue to stagnate. It should also be noted that the amount allocated for small-scale irrigation is insufficient to meet staple food requirements (millet, maize, etc.) and only provides for irrigation of gardens for vegetables and some cash crops.

Assuming a well initially designed for drinking water for 400 people (the standard adopted in Mali) and a daily requirement of 25 l/day, then daily demand for drinking water would be 10,000 liters. Irrigation of 1 ha, which is only 20 m<sup>2</sup> of irrigated land per family of eight, requires approximately 86,400 liters; therefore, it is not unreasonable to assume that even small-scale irrigation would greatly increase demand for water quite independently of population growth because of the increased intensification of water use.

**FIGURE 10. PREDICTED WATER TABLES IN BANI DISTRICT, MALI IN 2040 (SCENARIO 3)**

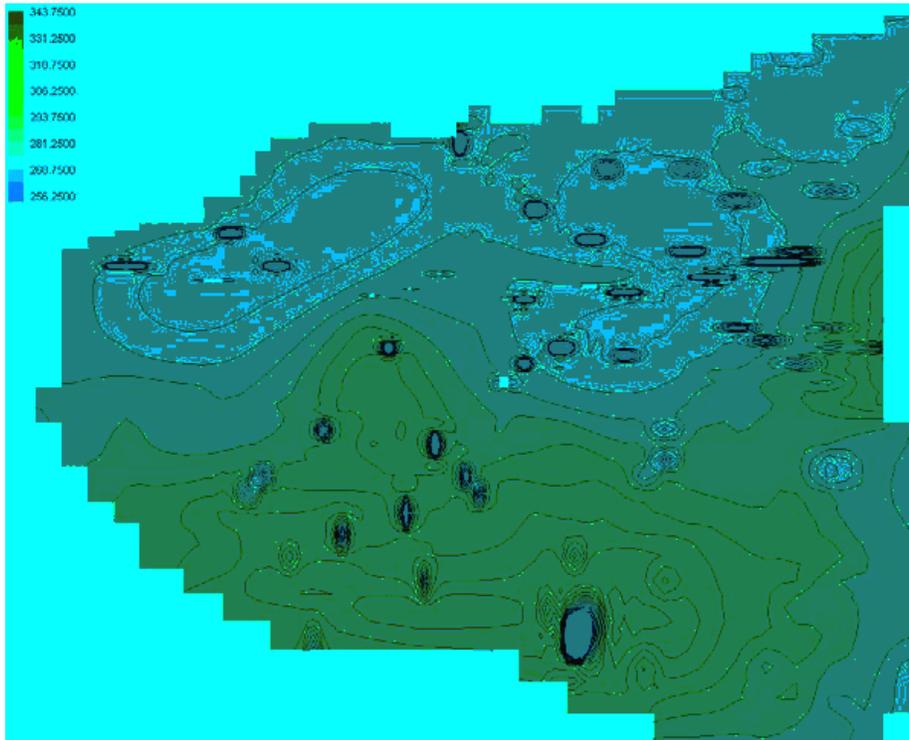

Source: Lutz et al., 2011

The primary lesson of this modeling exercise is that anthropogenic factors have enormous influence on model results; if these potential changes are not included in the model, then the results may be quite misleading. The changing demand that the intensification of agricultural activities causes can have far greater impacts than changes in recharge brought about by climate change.

Other studies provide additional evidence to support that anthropogenic and land use change influence groundwater recharge more strongly than climate change does in West Africa (Favreau et al., 2011; Seguis et al., 2004)

### 3.2.3 International Water Management Institute in Volta Basin (Ghana and Burkina Faso)

A final example of modeling is at the macroscale. The International Water Management Institute (IWMI) modeled potential impact of climate change and changing demand for water on the water resources of the 403,000 km<sup>2</sup> Volta River basin, which covers most of Ghana and Burkina Faso, plus small areas of four other countries (McCartney et al., 2012).

The importance of modeling at this scale is to understand the dynamics and interrelationships of different sources of water and demand. Insofar as water resources within a river basin are finite, it is inevitable that changes in either water supply or water consumption in one part of a basin will have impacts on water supply in other parts of the basin. Indeed, the main purpose of the IWMI studies in the Volta River basin was to see how upstream activities affect water availability in lower parts of the basin.

The IWMI modeling approach is multi-stage, in that three different models were used sequentially to obtain the final results. The first stage was to estimate climate change (primarily rainfall and

temperature) from the body of information used in GCM predictions using the Consortium for Small-Scale Modeling – Climate Modeling (CCLM or COSMO-CLM). The changes in climatic variables were then fed into the United States Department of Agriculture (USDA)-supported Soil and Water Assessment Tool (SWAT) that models the full range of hydrologic processes within the lower atmosphere, plants, and soil, resulting in an estimation of recharge of groundwater. To account for anthropogenic influences, the results from the SWAT model were fed into the Water Evaluation and Planning (WEAP) model that allows modelers to include information on changing water demand patterns of both surface and groundwater resources.


The net results of the Volta Basin study (Figure 11) focus on changes in surface hydrology and surface water availability; they also show trends in groundwater recharge across the basin until the year 2100. The baseline model run, which assumes no change in demand, allows the impact of climate change alone to be estimated. The results of this run indicate that due to changes in both temperature (increasing by 3.8 °C) and rainfall (decreasing by 20 percent) until the end of 2100, flows in the Volta River near the sea and overall groundwater recharge would decrease by approximately 50 percent.

However, the IWMI study is primarily based on modeling of surface hydrology in the river basin, using groundwater and groundwater recharge as a residual. This means that any inaccuracies in the modeling of surface water changes will have a disproportionate effect on the groundwater residual in all of the equations. Further, the larger-scale effects of water transfers within aquifers are not accounted for in this modeling approach.

Nevertheless, the underlying fact that continued depletion of surface water resources will negatively affect groundwater resources remains, even if the actual value of that impact is as yet unclear.

Obviously demand will increase during the rest of this century, so the pressure on both surface and groundwater resources will be higher than suggested in Figure 11. The modeling exercise indicates that economic growth will not meet expectations in the basin due to inadequate water supply.

**FIGURE 11. ESTIMATED DECLINE IN SURFACE FLOW (A) AND GROUNDWATER RECHARGE THROUGHOUT THE VOLTA BASIN (SCENARIO BASED ON NO CHANGE IN DEMAND)**

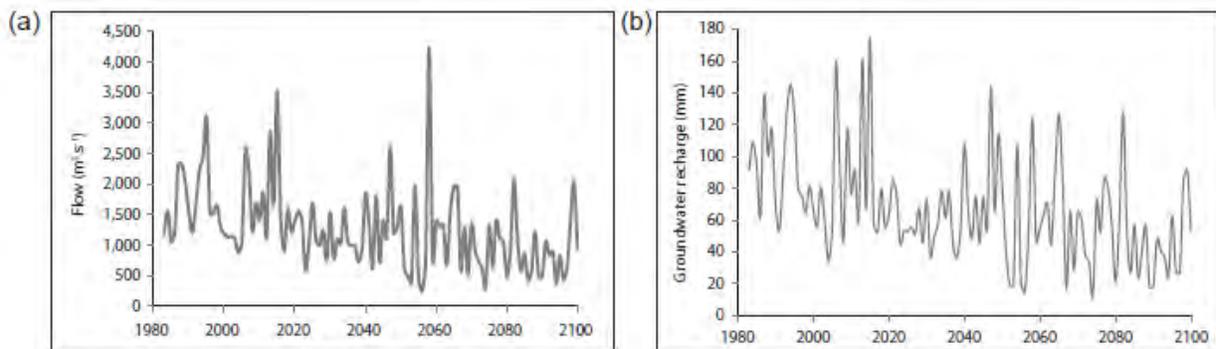

Source: McCartney et al., 2012

Many other modeling studies come up with comparable results. A study completed in the Donga basin of Benin (IUCN, 2004) showed that a decrease of 20 percent in annual rainfall produces half of the annual discharge in groundwater aquifers. A decrease in annual rainfall influences both fast- and slow-flow components. Fast flow is found to be more sensitive to inter-annual rainfall variability, though it is the smallest component of stream flow.

Both the IWMI and IUCN studies highlight the need for a more comprehensive modeling assessment of both surface and groundwater variations, including sensitivity to both climate change and continued anthropogenic impacts.

Common to all of these studies is the consensus that groundwater recharge is very sensitive both to the impact of climate change and to changes in demand for water. The following chapter examines in detail what demands for groundwater currently exist and how they may change in the future.

# 4.0 GROUNDWATER USE IN RURAL WEST AFRICA

## RURAL WEST AFRICA

Exploitation of groundwater resources in rural areas in West Africa has entered a third phase, which poses considerable threats to the heretofore relative stability of aquifer conditions. To understand the nature of these threats, it is helpful to review briefly how people have been able to tap groundwater.

### 4.1 EARLY-PHASE EXPLOITATION

For centuries, people have tapped groundwater for drinking and livestock by using hand-dug wells equipped with rope and buckets (Figure 12). Some lifting is strictly manual, and some uses animal power to haul larger buckets made of leather or, more recently, nylon or plastic. In traditional wells, logs are used to help guide ropes and pull water up. In more modern times, the ropes run over metal pulley wheels to reduce the friction.

**FIGURE 12. TRADITIONAL DUG WELL WITH ROPE AND BUCKET LIFTING**



Source: USAID website for Niger

With this technology, the amount of water that can be raised at any one time is quite low. The deeper the water level in the well, the less water can be raised. In many areas, animals are harnessed to the rope so that larger volumes can be raised – typical buckets for animal lifting have about an 80-liter (80-kg) capacity; with four to six animals, water can be raised from more than 100 meters.

Although the overall water yield of hand-dug wells is low, they have allowed human settlement in large parts of West Africa, particularly in drier areas where there are few other sources of potable water. They have helped support large herds of livestock throughout the Sahel.

Hand-dug wells cannot easily be dug into the saturated portion of an aquifer. They may only penetrate a meter or two into the saturated zone, and are thus susceptible to a decline in groundwater levels. However, although risky and extremely unpleasant, it is possible to deepen hand-dug wells as the need arises (Figure 13).

**FIGURE 13. WELL DIGGER IN NIGER**



*Source: Friends of Niger, n.d.*

## **4.2 THE ADVENT OF BOREHOLES AND MANUAL PUMPING**

The introduction of modern drilling techniques has been the key to the success of potable water programs. Drilling enables the installation of metal or plastic tubes (hence the term tubewells) down into the saturated part of the aquifer, and can extend deep into the saturated zone. This practice increases water yields significantly, as a greater area of aquifer can be tapped.

The vast majority of tubewells are fitted with hand- or foot-powered pumps. Because the tubes are narrow in diameter and the pumping mechanism is fitted with a foot valve, water can be lifted from a greater depth than if the tubewell were fitted with a simple suction pump. Simple suction pumps cannot raise water more than about 7 meters; the weight of water supported by atmospheric pressure alone will cause the water column to break if it exceeds 7 meters.

Most modern hand pumps use lifting principles that allow people to obtain water from between 15 and 45 meters depending on the pump design. Below 45 meters, the designs become more complicated, are generally less reliable, and require significantly more effort to raise the water. It is theoretically possible to use hand pumps to lift water from about 70 meters, but the effort involved is enormous.

**FIGURE 14. BOREHOLE WITH HANDPUMP**



*Source: British Geological Survey, n.d.*

West Africa now has tens of thousands of boreholes with manually operated pumps (Figure 14). At first, there was a huge range of different pumps; however, over time the market has become more rational. The most common pumps are the India Mk II and Mark III pumps, as well as the Afridev pump. Although neither design is flawless (the mechanism linking handles to the piston is the most vulnerable to breakage), most countries now accept them as the desired pump and have guidelines or legislation to force standardization of pump installations. There is strong logic behind these guidelines – local mechanics know how to fix them, spare parts can be made locally and are in stock in local market towns, and there is overall cost-effectiveness.

Most donors go along with these regulations, but still some smaller, private NGOs attempt to introduce models of their own design. This approach may give the NGO its own brand identity, but there is a greater risk of weak or non-existent supply and support mechanisms for O&M after installation.

A spin-off from tubewell design and development has been the introduction of manually powered lift pumps installed with manually drilled boreholes. Manual drilling methods allow low-cost wells to be provided without having to wait for more expensive mechanically drilling rigs. The most effective handpump that offers low cost and low discharge is a rope pump powered by hand or a modified bicycle.

The Rural Water Supply Network (RWSN), hosted by SKAT in Switzerland, has been at the forefront of developing and promoting use of manual drilling and simple pump technologies as an alternative to the larger, more expensive, industrially managed India and Afridev handpumps. The RWSN website provides a wealth of information on these technologies ([www.rural-water-supply.net](http://www.rural-water-supply.net)). In West Africa, Water and Sanitation for Africa (WSA), formerly known as CREPA, has been the main international body promoting low-cost water supply technology, supported by WaterAid, a U.K.-based NGO focusing on water supply in many countries ([www.wsafrika.org](http://www.wsafrika.org)). WAWI sponsored a manual for low-cost drilling prepared by SKAT using USAID funds (WAWI, 2011).

These changes in pumping technology have led to an increase in pumps designed for small-scale irrigation. Globally, the most widespread is the treadle pump, widely adopted in parts of India and Bangladesh but much less popular in Africa. Adaptations of the treadle pump, which turn some of the energy into pressurizing water within the pump, enable operators to pump water uphill and irrigate a larger area. The Kick Start MoneyMaker is an example of this technology. These small-scale irrigation

pumps, which can also use surface water bodies, are limited to the 7-meter lift limit because they primarily act as suction pumps.

There is widespread consensus that up to this level of development, manual pumping of water associated with mechanical or manually drilled boreholes does not pose a significant threat to groundwater resources. Such was the conclusion of Lutz et al. (2011) in the Bami area modeling exercise as well as of the BGS and other experts in the field. The human effort required to lift water manually does not permit significant drawdown of the water table, and rates of extraction almost always appear to be less than those of natural aquifer recharge.

Increasingly, however, people are trying to modify manually operated pumps so that other sources of power can drive them. We have reached the point in West Africa where this practice is beginning to threaten groundwater resources.

### **4.3 THE INCREASING ROLE OF MOTORIZED PUMPS**

As soon as a motor is attached to a pump, the whole dynamic of groundwater exploitation changes. Rather than relying on the limits imposed by human energy in raising water, motorization allows pumps to operate for much longer periods at higher discharges. Not only can basic needs for drinking water and livestock be met, but now water is also readily available for irrigation.

Pumping groundwater for both water supply and irrigation is not new to West Africa, but this niche has been occupied largely by government entities either for small town water supply systems or strategic rural water installations as part of drought mitigation systems. The high energy costs, particularly for deep groundwater extraction, limit the number of installations government can afford to operate and maintain.

**FIGURE 15. MOTORIZED PUMP IRRIGATION IN GHANA USING A TRADITIONAL OPEN WELL (UPPER) AND A LOW-COST BOREHOLE (LOWER)**



Source: IWMI, n.d.

More recently, motorized pumping has become attractive to the commercial sector and many NGOs because of the increased availability of small (5-7 horsepower) diesel or petrol-driven motor and pump sets (Figure 15). The portability of these motors means that they are well suited for small-scale irrigation, particularly if there are many small plots scattered within a village.

There is also a big increase in the number of solar-powered motors being used for irrigation and livestock. Solar pumps have very high investment costs but low operating costs. They do not normally have the power to lift large volumes of water to the surface, but because they run for 10-12 hours per day, they can gradually fill storage tanks for use as and when required (Figure 16).

**FIGURE 16. SOLAR-POWERED SMALL-SCALE IRRIGATION, BENIN**



*Source: Post Carbon Institute, n.d.*

The impact of extractions of comparatively large amounts of water from an aquifer may be felt over wide areas. All water in a river basin is interconnected in one form or another. Extracting water from an aquifer for irrigation means the aquifer is being depleted and that there will be less water somewhere else, caused either by simple a lowering of the water table or a reduction in the rate of groundwater replenishment of rivers and surface water bodies.

The impact of scaling up motorized groundwater pumping is much more important than that of scaling up manually pumped groundwater, because the total volumes involved are so much larger. For example, the hydrologic consequences of motorization of groundwater use for irrigation are completely different than for hand pumping of water for drinking. With a good hand pump, it is not difficult to supply about 25 l/person/day, so a pump typically serving 50 families or 400 people will extract 10 m<sup>3</sup>/day. An efficient solar-powered drip irrigation system that provides enough water for each family to cultivate 120m<sup>2</sup> will require upwards of 42m<sup>3</sup>/day<sup>4</sup>, increasing the total water extraction from the same water source by more than five times.

---

<sup>4</sup> These figures are not random guesses; they are based on an actual solar-powered system in Benin.

The lure of not only providing good quality drinking water but also of improving nutritional and economic conditions provides a big incentive for promoting small-scale irrigation based on motorization, and scant attention is paid to management of groundwater resources. One example of the somewhat cavalier attitude toward the water management and institutional dimensions of promoting small-scale irrigation follows (Burney et al., 2010):

*Groundwater PVDI (photo-voltaic pressurized irrigation) systems must be designed based on existing groundwater resources (either previously drilled boreholes or new ones based on hydrogeological surveys). Beyond these very local constraints, however, national and regional level estimates suggest that irrigation can sustainably play a much larger role in agriculture in the Sudano-Sahel.*

At present, the number of installed motor pumps for groundwater-based irrigation appears to be comparatively small, but the number is on the verge of skyrocketing. Several reasons exist for this incipient explosion of motorized pumping: costs of solar- and diesel-powered motors are dropping, capital costs are often covered through subsidy programs from government or through donations from donors and NGOs, and entrepreneurs are learning that they can recoup their initial investment and expand their commercial interests.

The growth of motorized groundwater extraction is still in its infancy and has all of the attributes of a nascent sub-sector. It is largely uncontrolled and unregulated. Although permits might be required, it is all too easy to install a small-scale irrigation system using a diesel or solar pump without obtaining permission. Groundwater is treated as a freely available resource, although some commercial enterprises may pay modest water fees. The siting and depth of wells is unregulated.

There are many reasons for this lack of regulation and the resulting lack of sustainable management of motorized pumping of groundwater. The reasons are primarily institutional in nature; Chapter 5 addresses institutional issues as they relate to groundwater management.

Does the threat to groundwater that motorized pumping causes mean that motorized pumping should be discouraged? No, and it would be impossible to do so because of market forces. What is instead required is that we rethink how we manage groundwater resources at different scales, so that resources can be used efficiently and economically.

Pump irrigation is really effective in “conjunctive use” irrigation systems. Surface irrigation systems have comparatively low irrigation efficiencies due to over-irrigation in upper parts of the system and conveyance losses from the network of canals and ditches. Much of the unused water seeps into shallow groundwater. This groundwater can be pumped back to the surface, particularly in lower portions of the irrigation system, thereby raising system-level water use efficiency much higher.

Ultimately, the key to sustaining groundwater resources is to ensure that the rate of extraction does not exceed the annual recharge of the aquifer. In an ideal situation, monitoring groundwater extraction rates with parallel monitoring of water table elevation would allow groundwater to be used to its full extent without risk of depletion. However, in an environment with weak monitoring capacity of both volume of water pumped and water table elevation, there is a clear risk of overexploitation. This risk is amplified if there is uncertainty over aquifer recharge rates as a result of climate change.

# 5.0 IWRM AND GROUNDWATER MANAGEMENT

The previous chapters have presented a rather bleak view of groundwater and its sustainability in West Africa. There is limited accurate information on groundwater sources and current levels of exploitation, and there are threats to groundwater availability from the impacts of climate change, population growth and, perhaps most importantly, from the potential proliferation of motorized pumping. Existing institutions are poorly equipped to meet these threats. Planning, exploitation, and use of groundwater resources are fragmented and fail to take into account the need for a more integrated management approach.

Moving from this rather chaotic and piecemeal groundwater approach to a more rational program of integrated water management aimed at greater efficiency and sustainability of a critical resource may seem impossible; however, several practical actions may help improve the current situation.

IWRM is a process rather than a set of simple prescriptive steps. The process described below provides opportunities for establishing a more effective way of managing water resources that covers the full gamut of technical, economic, social, and governance concerns to ensure sustainable use of both water and land resources.

Although the process is applicable to most water management scenarios, some special cases in West Africa require additional concern – the management of groundwater for large herds of livestock, and the management of coastal aquifers. These two special cases are discussed at the end of this section.

## 5.1 THE VISION OF IWRM

There is a lot of talk about applying the principles of IWRM, but there seems to be little consensus about what this application actually entails. USAID's detailed description in its Water and Development Strategy document forms the basis for the descriptions of IWRM that follow (USAID, 2013).


IWRM is a participatory, bottom-up approach that makes short-term decisions on water use based on balancing water supply and demand. It focuses specifically on issues of governance with clearly defined responsibilities at different levels of civil society. What is absolutely fundamental to understanding IWRM is that it can operate effectively at the local level even if national-level activities are very weak or non-existent; however, it cannot function at the national level if it is not working effectively at local level.

In raising awareness of IWRM among different countries, we see an inevitable focus on the national-level activities from such entities as the Global Water Partnership (GWP). This focus is important in ensuring that policy and other supporting measures enter into the public debate; however, there has been no development of effective, local action programs that provide the basis for successful IWRM.

In this respect, scale is important. While national-level programs may look at water resources management and determine overall policies and strategies, implementation of IWRM is primarily a local-level activity within the overall national policy environment.

Figure 17 illustrates this concept.<sup>5</sup> The governance of IWRM is clearly separated into two components: a national-level policy and research program that provides the legitimacy of the lower-level participants, and a river basin/aquifer-based organization (or possibly one at the provincial level if governments insist upon this arrangement for administrative purposes) that develops its own set of operating rules and regulations that meet the site-specific conditions of the target area. The basin or aquifer management unit does not necessarily have to be housed within the Ministry of Water (or local equivalent) – U.S. and European bodies are often public entities but have a considerable degree of independence and are responsible to a board of directors with representation of all concerned stakeholders.

**FIGURE 17. GOVERNANCE STRUCTURE FOR IWRM**

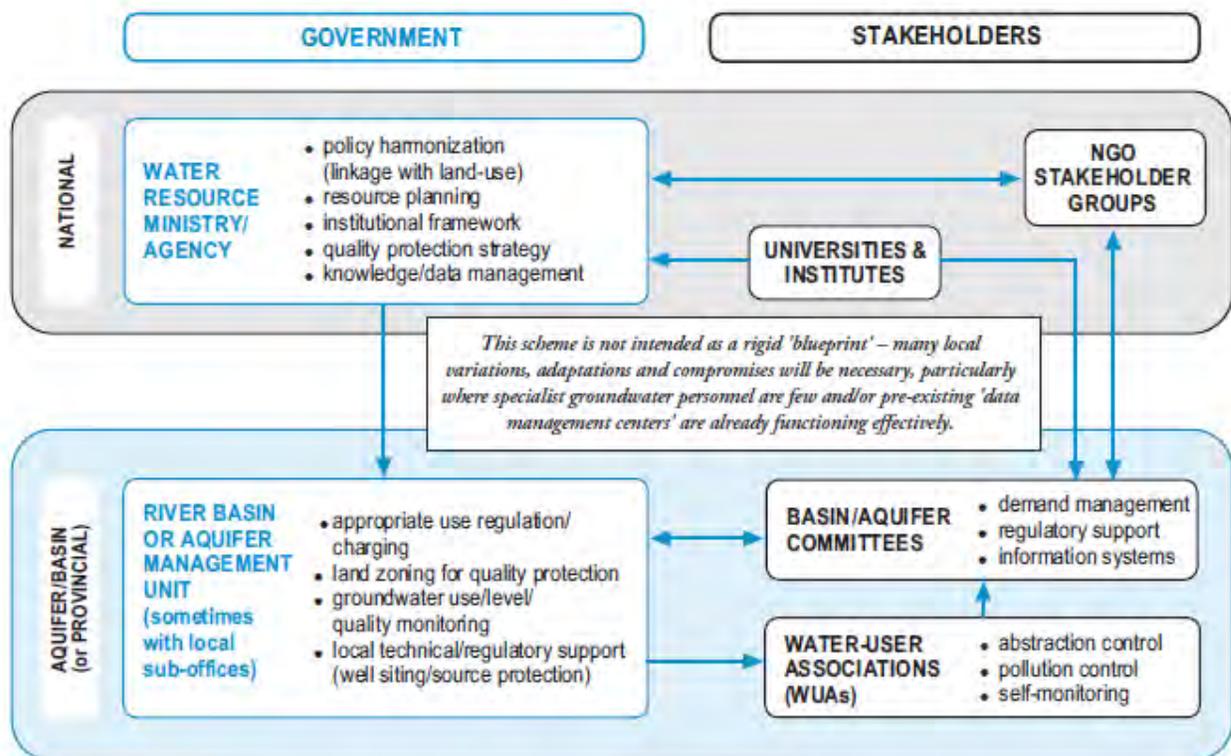

Source: UN-IGRAC, 2011

While the type of governance structure shown above is needed in the not-too-distant future if groundwater and surface water are to be effectively managed, there are plenty of opportunities for short-term activities that help establish the basis for improved IWRM in the future.

<sup>5</sup> With two comments. First, all arrows should be double-ended because there must always be two-way communication in participatory systems. Second, the term WUA means different things to different people – most existing WUAs have a single purpose such as drinking water or canal irrigation, whereas Figure 17 envisages a user group for all uses of water in their area of responsibility

## **5.2 PRACTICAL STEPS TOWARD IMPROVED GROUNDWATER MANAGEMENT**


This section presents practical steps to help develop a more sustainable approach to the management of water resources, both surface and groundwater, as a precursor to a broader program of IWRM.

### **5.2.1 Appraisal of potential technical and governance interventions**

The first requirement is to undertake an appraisal of whether the water resources in a project area are suitable for additional exploitation or whether there are opportunities for sustainable management of those water resources. The Global Environment Facility (GEF)/UN Food and Agriculture Organization Groundwater Governance Series provides practical measures that can be adopted for given target areas.

The decision tree in Figure 18 helps guide designers of a water management project toward the types of interventions, both technical and governance-related, required for any specific location. It is not difficult to conceive that this framework can be superimposed upon other project activities in the same location that may have an impact on the supply and demand of water resources. For example, a program to provide irrigation in rural areas can use this appraisal tool to determine whether there is scope for mechanized pumping in the area, or whether the project focus should be strictly limited to manual pumping that will probably never exhaust the local groundwater conditions.


**FIGURE 18. DECISION TREE FOR GUIDING INTERVENTIONS IN WATER MANAGEMENT PROGRAMS**

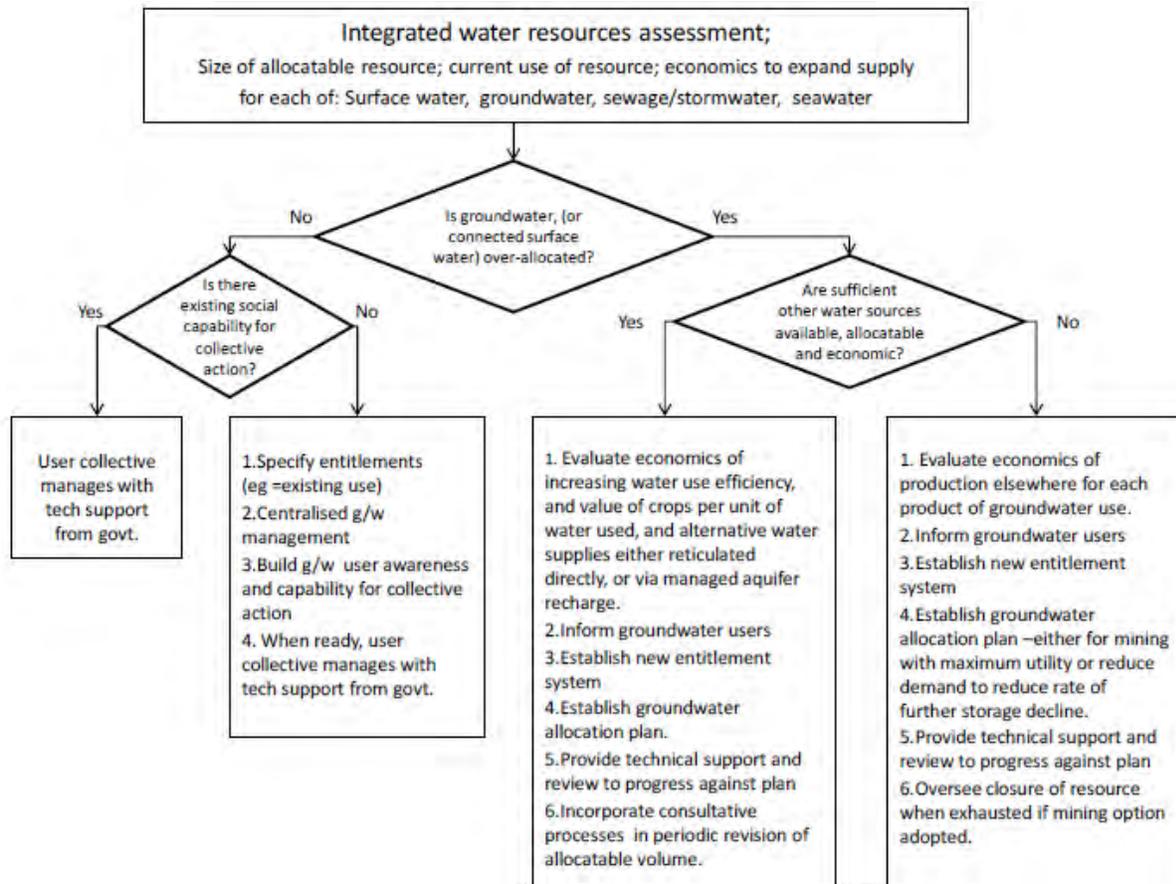

Source: Dillon et al., 2013

Under the auspices of the USAID portion of WAWI, Desert Research Institute developed a tool that identified areas suitable for manual drilling (Figure 19) that could be integrated into a wider program of Multiple-Use Services (MUS) for water. This is but one example of how information on water resources can be superimposed upon an agricultural program for a more integrated approach to water resources management (WAWI, 2011b).

FIGURE 19. SUITABILITY FOR MANUAL DRILLING, ZINDER REGION, NIGER

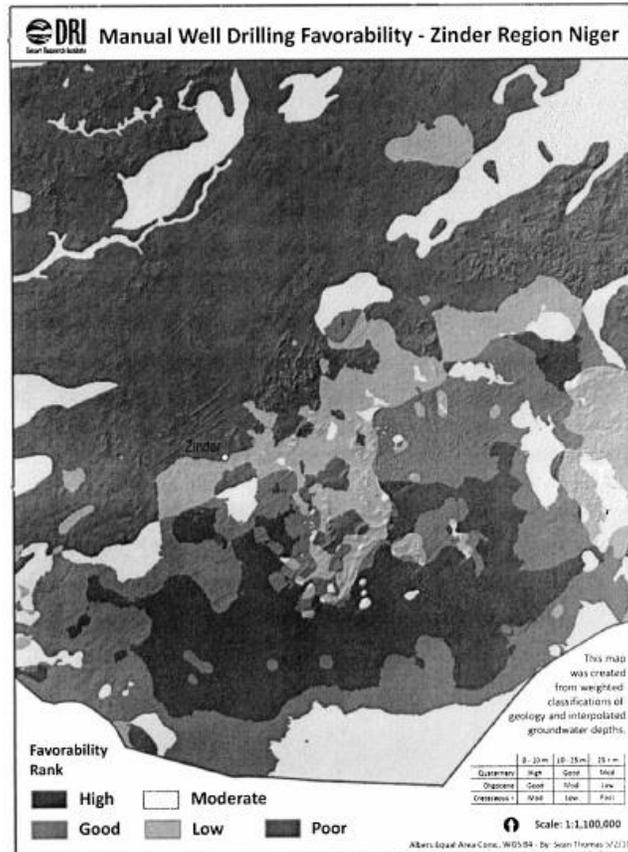

Source: WAWI(b), 2011

### 5.2.2 Managing supply and demand for surface and groundwater resources

Any program that wishes to move toward sustainable management of groundwater must take two fundamental principles into account:

- It is not feasible or sensible to try to manage groundwater separately from surface water resources; they are interconnected, and treating them as such improves the opportunity for sustainable water management.
- It is important to manage both supply and demand of water resources. Programs that only address demand management will be far less effective than programs that manage both supply and demand simultaneously.

There is plenty of opportunity for local interventions that will lead to improved management of both supply and demand. Table 4 provides a checklist of the more important aspects of supply and demand management.

**TABLE 4. TYPES OF ADAPTATION OPTIONS FOR WATER SUPPLY AND DEMAND**

Supply side	Demand side
Increase storage capacity by building reservoirs and dams	Improve water-use efficiency by recycling water
Expand rain-water storage to augment groundwater use and to promote small-scale agricultural programs	Reduce water demand for irrigation by changing the cropping calendar, crop mix, irrigation method, and area planted
Remove invasive non-native vegetation from riparian areas	Promote traditional practices for sustainable water use
Prospect and extract new groundwater resources; improve assessment of aquifer yields	Expand use of water markets to reallocate water to highly valued uses
Develop new wells and deepen existing wells	Expand use of economic incentives including metering and pricing to encourage water conservation
Maintain well condition and performance	Introduce drip-feed irrigation technology
Develop aquifer storage and recovery systems	License groundwater abstractions
Develop conjunctive use of surface water and groundwater resources	Meter and price groundwater abstractions
Develop surface water storage reservoirs filled by wet season pumping from surface water and groundwater	
Develop artificial recharge schemes using treated wastewater discharges	
Develop riverbank filtration schemes with vertical and inclined bank-side wells	
Develop groundwater management plans that manipulate groundwater storage, e.g., resting coastal wells, during times of low groundwater levels	
Develop groundwater protection strategies to avoid loss of groundwater resources from surface contamination	
Manage soils to avoid land degradation to maintain and enhance groundwater recharge	

Source: IPCC, 2008

### ***Demand-side management***

Demand management for groundwater focuses on two elements: efforts to minimize the amount of water extracted (demand reduction) and efforts to make water use as efficient as possible once it has been pumped or lifted to the ground surface (water-use efficiency). In reality, the amount of savings or efficiency increases that can be accomplished when water is manually lifted is very small. People minimize pumping to meet their actual needs; thus, as long as the amount of manually pumped water does not exceed aquifer replenishment, then there is little basis for action.

If water is extracted in quantities greater than those of recharge, then demand management becomes important, particularly for larger-volume users with mechanical pumping capacity. Implementing a demand management program retrospectively is difficult, particularly where people have been able to access groundwater more or less without volumetric limits or water fees. The cost of power is the only available instrument.

Looking at current patterns of groundwater use in West Africa, we can make a very crude distinction between groundwater systems specifically designed for domestic drinking water supply, and those that include additional uses of water, primarily for livestock and for irrigation.

Typical estimations of demands on water for domestic consumption alone vary from 25 l/day for hand pumps in rural areas, 50-70 l/day for standpipe systems, and more than 100 l/day where people are connected to some form of pipe network. The increased demand reflects greater capacity to include health-related water uses to include better washing, laundry, and sanitation.


When livestock and irrigation are added to the estimation of demand, these figures escalate dramatically. Actual livestock water requirements vary according to the moisture content of feedstuff, whether the animals are pastured or grazing in forests, and the species (a typical cow may require up to 50 l/day, and sheep and goats about 10 l/day). In locations with large herds or where transhumance is practiced, this demand can place quite considerable stress on water resources (Schlink et al., 2010).

Irrigation further compounds the problem. Dry-land grain crops require 300 to 500 mm of water during the growing season, increasing to closer to 1000 mm in rice-based systems. Obviously some of this water can come from irrigation, reducing demand for irrigation water if there is timely and effective response to rainfall events. Based on these figures, water requirements for food to meet basic human nutrition requirements can be upwards to 1000 m<sup>3</sup> per year. Indeed the food requirement forms the vast bulk of estimates of 1,750 m<sup>3</sup>/year as the baseline for determining whether an area is exposed to water stress.

### ***Supply-side management***

While most of the demand-side adaptations are well known and are incorporated into many agricultural and water management projects, the supply side adaptations are less commonly practiced. Many of the demand adaptations aim at inducing recharge into aquifers, using the aquifer as an underground reservoir. Figure 20 shows some of the approaches that can be adopted to manage recharge of groundwater in addition to natural recharge processes.

**FIGURE 20. APPROACHES TO AUGMENTING RECHARGE OF GROUNDWATER**

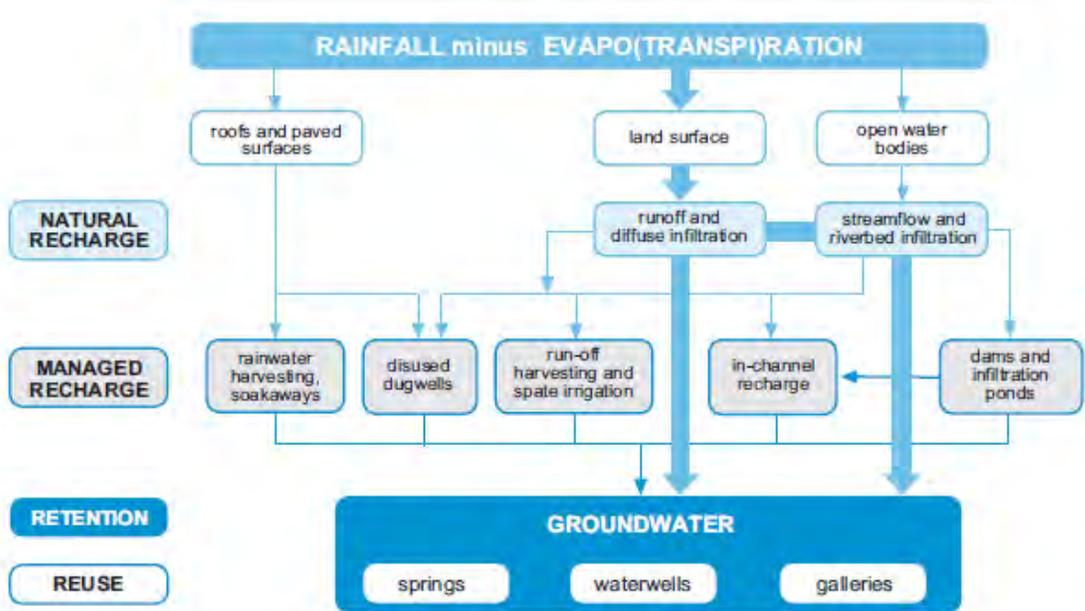

Source: UN-IGRAC, 2011

Supply-side efforts to manage recharge illustrate very clearly the integration of management of surface and groundwater resources, as well as the linkage with land use and other anthropogenic factors. If soils and natural vegetation are properly managed, particularly with various types of conservation agriculture, then it is possible to not only enhance crop production and crop water productivity, but also to help recharge groundwater for later use.

As a result, supply-side water management for both surface and groundwater forms a logical and integral part of agricultural development and natural resource oriented programs. This side is the heart of IWRM and should be much more widely practiced than it currently is.

It is almost inevitable that at some point a zero-sum situation will develop as water resources get scarcer. At the river-basin level, the concept of “open” and “closed” basins effectively distinguishes between situations in which there is sufficient water to meet all needs (with excess water leaving the system [the “open” basin scenario]), and one in which water is insufficient to meet all needs, and tradeoffs between uses or locations is necessary (the “closed” basin scenario).

This concept of open and closed applies at every scale. Local-level water resources can be managed with the same overall philosophy of quantifying supply and demand and making the appropriate supply and demand management adjustments, as is done at the scale of a major river basin.

## 5.3 TWO SPECIAL CASES FOR GROUNDWATER MANAGEMENT

### 5.3.1 The special case of water and livestock

The large livestock herds of nomadic and semi-nomadic people in West Africa require special attention where exploitation of groundwater is concerned. Under conditions of long-term sustainability, there is some form of overall balance between climate, vegetation, water resources, and human activity.

Anthropogenic impacts that lead to reduction in the overall carrying capacity of water and vegetation are not sustainable, and some form of adjustment is required. This adjustment can include urban migration, internal migration to areas with higher carrying capacities, and changes in behavior toward more productive systems.

Shallow aquifers form part of this interlinked ecosystem – too much depletion of groundwater has quick impacts on the production system, and adjustments have to be made.

Nomadism and transhumance are responses to seasonal variability in the productivity of different ecosystems. Moving livestock from place to place in a regular pattern so that resources would not be depleted beyond a critical threshold underlies the entire transhumance process. Both vegetation and water play a role in determining the pattern and timing of movement.

Development of groundwater resources to augment water supplies in locations where water is inadequate seems like a good idea and has certainly helped to mitigate the impact of drought in many parts of the Sahel. However, tinkering with only one part of the ecological system may impose huge stresses on other parts: vegetation also suffers during drought periods, and if it is inadequate herders may move their animals to other locations to avoid both lack of water and lack of food for their animals. If the water constraint is removed so that animals are watered adequately, the pressure on vegetation suddenly increases dramatically. The National Research Council observed this trend and reported on the negative impacts as early as 1983; however, some programs still aim to provide supplemental water to nomadic groups, which ultimately is likely to have negative impacts on vegetation resources.

Using fossil groundwater only exacerbates this potential imbalance, because the existing ecosystem has evolved without the benefit of this additional water resource. Given that the fossil groundwater resources are largely found in the driest parts of West Africa, the potential for negative impacts on local ecologies is very high. The very high-cost Libyan solution of pumping water hundreds of miles toward more robust ecological areas is not a viable option for West Africa given the lack of cheap energy.

IWRM in these dry areas with high levels of transhumance, with or without use of fossil groundwater, needs special attention to safeguard fragile ecological resources.

### 5.3.2 The special case of coastal aquifers

Coastal aquifers provide another special case for IWRM. Unlike normal aquifers, where the main concerns are with managing the depth to groundwater and ensuring that the water resources of aquifers are not depleted, coastal aquifers require managing the boundary between saline water and freshwater. Near major urban areas, pollution from sewerage and industry may become an additional management concern.

In coastal aquifers, freshwater sits on top of saline water within the same geological layers. Saline water is denser and is kept at depth by the weight of the freshwater in the upper portions of the aquifer. If the freshwater is depleted, then the saline water will move upward and inland; if it reaches into the well extraction zone, then the water rapidly becomes unsuitable for human consumption.

Coastal aquifers are replenished by a combination of local rainfall and excess water draining toward the coast through normal streamflow; thus, unlike many groundwater-dependent systems, coastal aquifer management is both a local and a regional management issue. Local activities, primarily pumping without regard to levels of sustainability of the underlying aquifer, have the potential to deplete the aquifer. But poor upstream management of surface water resources, such as indiscriminate damming or pumping,

may greatly reduce the level of replenishment of coastal aquifers during the flood season. Indeed, one characteristic of a closed coastal basin is that salt-water intrusion becomes probable, if not inevitable.

Many of the coastal aquifers in West Africa are already threatened by poor upstream management of surface water resources, and there has been concern for some time about the depletion of mangrove and fish resources. Close to major cities — notably Dakar, which heavily depends on groundwater for domestic and industrial use — the aquifers are under even greater stress from a combination of depletion and pollution.

Because coastal aquifers are so delicate, and because the management problems are much more complex than in inland locations, coastal aquifer management requires an entirely different set of skills and approaches to IWRM.

## 6.0 KEY QUESTIONS: WHAT CAN BE DONE?

In determining the opportunities that exist for improving groundwater management in light of the possible consequences of climate change, it is necessary to ask ourselves two questions:

- When we consider possible changes in climatic conditions, must we develop additional management requirements over and above what we should be doing in the regular course of events?
- Can we effectively disaggregate the impacts of climate change from anthropogenic changes related to population increase, migration, and adoption of new technologies?

The probable answer to both of these questions is “no, we can’t,” but that is no reason not to include climate change in our response to the continued and growing need to provide more and better-quality water to both rural and urban populations throughout West Africa.

One commonly voiced strategy for ameliorating the impacts of climate change is to increase irrigation as part of the focus on assuring food security under increasingly uncertain and variable climatic conditions. Irrigation — preferably small scale and locally controlled rather than less efficient large-scale, state-run systems — has enormous potential to provide more stable and healthier food production; however, it also requires a great deal of water. Programs that promote small-scale irrigation have the responsibility to ensure that by adding irrigation to the demand for water, be it groundwater or surface water, they will not threaten the overall sustainability of the water source. These programs must also ensure that adding additional water into local ecosystems will not lead to inadvertent effects such as salinization, soil degradation, or waterlogging.

As in the example of irrigation, with adaptive strategies, we must ensure that we provide robust and participatory management systems for implementing groundwater development programs that include awareness of the impacts of all external threats to the community and its natural resources. This shift includes, but is not limited to, an awareness of and response to the impacts of climate change.

At present, conventional wisdom is that IWRM provides the best approach for coping with external threats at the community level, with appropriate upward linkages to management, policy, and strategies articulated at provincial and national levels.

It would be naïve to think that an effective program of IWRM with a nested and responsive governance framework could be created in the short term. As long as there is some degree of an overall shared vision of what IWRM should look like in the future, several different types of project activities within a target area can be undertaken to help meet the shared vision.

Existing programs that address issues of agricultural or national resources may guide the selection of a target area. While it is a long-term goal to manage water by basin or by aquifer, the initial likelihood is that the target area will conform to administrative boundaries.

A practical and effective approach is to adopt a modified MUS program. Under the WAWI project in Niger, Winrock successfully implemented a pilot MUS program involving several clusters of villages. The

results are described in detail in one of the Technical Reports that accompanied the Final Report of the WAWI II project, submitted to USAID in February 2011. It should be noted that MUS received strong support from the provincial government in Zinder, including the Governor himself and the head of the provincial office of the Ministère de l'Hydraulique.

However, for an IWRM-oriented program, there must be some modification of the scope of work of the Niger MUS activity. Most of the water management activities were demand-side oriented, so a supply-side component would need to be added. On the other hand, less focus on hygiene behavior change would release resources for more water-oriented activities.

## **6.1 IMPROVING INFORMATION ON GROUNDWATER AND ITS EXPLOITATION**

Once a target area has been identified, an invaluable first step is to begin to establish some form of database for the water resources. Traditionally this step has been viewed as the purview of the Ministry of Water or equivalent, but it should be a highly participatory activity. Use of rapid rural appraisal techniques to identify water sources, water use patterns, cropping calendars, and so on using satellite-based maps provides an ideal opportunity to involve villages directly at the outset of any effort to establish effective IWRM.

The second step is to help establish a database of that information clearly within the public domain. Databases that are locked away in government offices are of little value. An excellent example of a targeted database is the *Système d'Information pour la Gestion Intégrée des Ressources en Eau* (SIGIRE) database in Mali, developed with support from the German government through GTZ. More details on the types of information included in SIGIRE are available at: <http://www.aht-group.com/index.php?id=715>. Two target regions of Timbuctou and Kayes were selected as pilots to help develop both the data collection program and the database design. The program is being extended to other parts of Mali under a second phase of the project.

Research inputs are also valuable at this stage. The DRI map of areas suitable for manual drilling in Zinder District, Niger, provides guidance as to where water is most likely to be found in adequate quantities for both drinking water and agriculture.

One piece of information important for supporting both demand-side and supply-side groundwater management is the seasonal variation in depth to water table. This information allows people to determine early in the dry season whether the groundwater resource is under threat, and whether there need to be restrictions in groundwater extraction to conserve water until the next rainy season.

The development of improved databases is a key element in the effectiveness of response to climate change. Given uncertainty of climatic variables into the future — and especially that of rainfall in terms of both total annual rainfall and the nature of individual rainfall events — a close watch of both short-term fluctuations in water table elevation and long-term changes in aquifer storage is essential. This watch will help warn of impending groundwater shortfalls that a result from drought and will pave the way for mitigating measures to help conserve water during abnormal periods.

Other resource-mapping programs, primarily based on satellite interpretation that field-level observation supports, also complement the water database.

## **6.2 GROUNDWATER DEMAND MANAGEMENT ACTIVITIES**

Project components can be drawn from the list of groundwater demand-side interventions shown in Table 4. The exact selection of possible interventions heavily depends on the local conditions as well as

the existing institutional framework. To the extent possible, the selection should also be as participatory as possible.

Projects that introduce technologies into an area for the first time have a better chance of implementing the more economic or fiscal instruments, because there will be fewer preconceptions about paying for water or limiting amounts extracted from aquifers.

The main focus for demand-side management is irrigation and other larger consumers of water. Water supply and even manually pumped or lifted water projects do not need economic or fiscal instruments because they are more or less self-regulating.

A huge gap in most countries is the presence of irrigation and water management technicians who can help implement IWRM programs. In almost every country, the split between agriculture and engineering means that agricultural extension agents know little or nothing about water management (aside from maybe some idea of crop water requirements); at the same time, the Ministry of Water field staff know little or nothing about agricultural production, conservation agriculture, or natural resource management.

IWRM is the ideal place to field people in the discipline of rural engineering, which crosses the boundaries between hydrology and hydraulics on one side, and agriculture and land use management on the other. A project focused on water management would do well to help establish a partnership of this nature.

Demand management has to start at the local level and be based on a local interpretation of fairness, particularly in the event of either short-term or long-term changes in groundwater availability in light of climate change. If groundwater levels are dropping, particularly early in the dry season, then the community has to devise measures that will help conserve water for use until the next rainy season. This type of demand management cannot be imposed from outside, because it is impossible to manage this process without the full collaboration of water users themselves. However, water resources frequently cross administrative or customary boundaries, so there is always a need for direct interactions between neighboring communities to ensure that one community is not negatively affecting adjacent ones. For large aquifers, some form of regional-level monitoring may be required, accompanied by clear guidelines of extraction rates in the constituent communities.

Over time, a well-functioning Water Management District and its constituent Village Water Resource Management Committees<sup>6</sup> will be better equipped to develop strategies to respond to changes in rainfall and groundwater availability and to implement appropriate water conservation strategies.<sup>7</sup>

### **6.3 MANAGEMENT OF GROUNDWATER SUPPLY**

At the village level, management of the supply side of groundwater aims to implant best practices that will increase the total amount of infiltration into productive aquifers. Some of these practices are part of the standard arsenal of natural resources management; others require more specialized inputs.

---

<sup>6</sup> See section 6.4 for an explanation of this term.

<sup>7</sup> This is the way the Water Management Districts in Florida function. They have a laid-back approach until groundwater levels reach a critical depth, when they then impose water conservation strategies to maintain water tables at levels required to protect drinking water and agricultural water resources.

All soil conservation techniques, including terraces, tied ridges, live terraces, and windbreaks help to slow the rate of surface runoff and to increase the volume of water infiltrating into the soil. Unless the rainfall event is followed by a prolonged dry period, some of this additional soil moisture will pass through the root zone and end up as groundwater.

Forest and grazing land protection and management also help rainfall to infiltrate into the soil. Bare soil that crusts as it dries out results in high levels of surface runoff, leading to a reduction in the amount of water available for recharge.

The AMMA CATCH results that showed that channeling runoff toward areas where infiltration is faster will help recharge aquifers; thus, there must be community-wide agreement on how to channel flows as well as an accompanying aquifer management plan.

A more drastic approach adopted in Burkina Faso has been the construction of thousands of small dams to help groundwater recharge. Although the small dams were designed as surface water supplies to provide agriculture and livestock water in the dry season, they also help recharge groundwater that can be pumped out for irrigation.

If local recharge efforts work, then water tables will be consistently higher at the start of the dry season, providing additional security if rainfall patterns become unfavorable. The worst-case scenario at the local level is to fail to replenish the aquifer by the end of the wet season, because groundwater will be under increasing stress during the ensuing dry season.

#### **6.4 IWRM INSTITUTION-BUILDING AT THE LOCAL LEVEL**

The closest USAID has come to supporting IWRM-oriented institutions is through the implementation of MUS programs. In its very conception, MUS addresses almost all the elements of a well-managed IWRM-based Water User Association (in the sense implied in Figure 17): documentation of and responsibility for all sources of water in a village, for who accesses that water under what conditions, for promoting effective use of water for drinking, hygiene, livestock, and irrigation, as well as managing the soil and vegetation resources of the village. Although cumbersome, the title “Village Water Resources Management Committee” best describes their function.

A good MUS program promotes both supply and demand management activities at the village level and facilitates the creation of federations to address management issues at the sub-basin, basin, or aquifer level. Linkages with technical agencies can be focused and strengthened here.

Government agencies’ and civil society’s widespread acceptance of the MUS program in Niger indicate that it is a viable approach even in areas where water resources are limited. This acceptance was accomplished without any formal water organizations being formed; however, there clearly would have been scope for these formations if the project had not ended.

The same approach to institution-building from the bottom-up would work just as well for a modified MUS approach, initially relying on informal linkages. At a later stage, once benefits are perceived and there is greater confidence in being able to manage the approach, the establishment of more formal basin-level or aquifer bodies can be considered.

Establishing strong management institutions, particularly at the local level, is a critical first step to respond better to climate change. Local institutions can respond to local water resource variations if they can develop a monitoring capacity and not have to rely on longer-term information from central government. Central government may be in a position to make national or regional estimates of rainfall and temperature variations to help in planning, but responsiveness must remain primarily a local

function. Without a dual set of efforts at both the national and local levels, countries will be less well equipped to respond to climate change.

## 7.0 CONCLUSIONS

Groundwater in West Africa is one of the region's most precious resources. Its exploitation has supported pastoral and nomadic communities for centuries, and more recently has been the backbone of improvements in drinking water supplies for tens of millions of people. It is logical that future development, particularly in rural areas, will continue to maximize the value of groundwater for domestic consumption, livestock, and agriculture. With the likelihood of changing rainfall patterns associated with climate change, groundwater provides a critically important resource to sustain human health and livelihoods. Many intervention programs view groundwater, and particularly groundwater for irrigation, as a potential solution to counteract the effects of climate change.

Despite this context, the recent boom in groundwater exploitation has been poorly regulated. Village water supplies based on groundwater have proliferated due to the concerted efforts of governments, donors, and NGOs without effective monitoring of the impact of that proliferation on groundwater sustainability. A triple threat of changing rainfall patterns due to climate change, continued population growth that doubles the population every 25 years, and the increased use of motorized groundwater pumping combine to threaten long-term sustainability of groundwater availability.

Effective management of groundwater must start at the local level, because communities have to find ways to regulate access to groundwater; however, this regulation must cover access to all water sources, be they groundwater, stream-flow, seasonal ponds, or small reservoirs. This coverage forms the basis for integrated water management programs that can not only manage the demand for water but also help to replenish aquifers through supply management. This approach predicated the creation of Village Water Management Associations that should replace single-purpose Water User Associations established to maintain drinking water facilities or deal with irrigation water distribution.

The concept of Multiple Use Services for water — one that looks at how all water sources can best promote improved health, small-scale agriculture, livestock and protection of natural resources such as grazing and forests — has been viable at the pilot scale in West Africa. The MUS concept needs to be expanded to include the supply side of water management as well as demand management, and to incorporate local monitoring of water table conditions to guide communities toward safe levels of water extraction from aquifers. Such monitoring also provides indications of abnormal conditions brought about by the impacts of climate change, increased demand of water for drinking, and expansion of small-scale irrigation.

Central government support for IWRM at the local level should focus on policy, research, and the regulatory framework. Managers at the local level should have readily available information. Because IWRM is a participatory process and not a top-down approach, efforts must include the creation of appropriate institutions at all levels of civil society.

## 8.0 SOURCES

- Braman, L. M., van Aalst, M. K., Mason, S. J., Suarez, P., Ait-Chellouche, Y., and Tall, A. (2013). Climate forecasts in disaster management: Red Cross flood operations in West Africa, 2008. *Disasters*, 37(1): 144-164.
- British Geological Survey. (2011). "Download digital groundwater maps of Africa." Retrieved from <http://www.bgs.ac.uk/research/groundwater/international/africanGroundwater/mapsDownload.html>
- British Geological Survey. (n.d.). "British Geological Survey." Retrieved from <http://www.bgs.ac.uk/>
- Burney, J., Woltering, L., Burke, M., Naylor, R., and D. Pasternak. (2010). Solar-powered drip irrigation enhances food security in the Sudano-Sahel. Retrieved from <http://www.pnas.org/content/early/2010/01/13/0909678107.full.pdf>
- Carter, R.C. & Parker, A. (2009). Climate change, population trends and groundwater in Africa. *Hydrological Sciences Journal*, 54(4): 676-689.
- Diagana, B., (1994). Improving Water Supply Systems in Rural West and Central Africa, IDRC, workshop held in December 1994 in Cairo, Egypt.
- Döll, P. (2009). Vulnerability to the impact of climate change on renewable groundwater resources: a global-scale assessment. *Environ. Res. Lett.* 4 (2009) 035006 (12pp). DOI :10.1088/1748-9326/4/3/035006
- Dillon, P., Escalante, E.E., & Tuinhof A. (2013). Management of aquifer recharge and discharge processes and aquifer storage equilibrium. GEF-FAO Groundwater Governance Thematic Paper 4: GEF, Washington, D.C.
- Friends of Niger. (n.d.). "Website of the Friends of Niger." Retrieved from <http://www.friendsofniger.org/>
- GEF-FAO (2011). Trends in local groundwater management institutions. Groundwater Governance Project: A Global Framework for Country Action, Thematic Paper 7. GEF, Washington, D.C.
- Goulden, M., Conway, D., and Persechino, A., (2008). Adaptation to climate change in international river basins in Africa: a review.
- IGRAC. (2012). Special Edition for the 6<sup>th</sup> World Water Forum, Marseille, March 2012.
- IMWI. (n.d.). "IWMI website." Retrieved from [www.iwmi.cgiar.org](http://www.iwmi.cgiar.org)
- IPCC. (2008). Climate Change 2007: impacts, adaptation and vulnerability. Summary for policy makers.
- IUCN. (2004). Reducing West Africa's Vulnerability to Climate Impacts on Water Resources, Wetland and Desertification. Elements for Regional Strategy for Preparedness and Adaptation. Editors: Madiodio Niase, Adel Afouda, and Abou Amani.
- Jenkins, G., Gaye, A., Kamga, A., Adedoyin, A., Garba, A., and Sarr, A. (2004). GCM simulations for West Africa: Validation against observations and projections for future change. Presentation to

the 2nd AIACC Regional Workshop for Africa & Indian Ocean Islands, March 24-27, 2004, Dakar, Senegal.

- Kane C., Diene, M., Fall, M., Sarr, B., and Thiam, A. (2012). Reassessment of the Resources of a Deep Aquifer System under Physical and Chemical Constraints: The Maastrichtian Aquifer. *Journal of Water Resource and Protection*, 4(4): 217-223. DOI: 10.4236/jwarp.2012.44024
- Lebel, Thierry, Cappelaere, Bernard, Galle, Sylvie, Hanan, Niall, Kergoat, Laurent, Levis, Samuel, et al. (2009). AMMA-CATCH studies in the Sahelian region of West-Africa: An overview. *Journal of Hydrology*, 375(1-2): 3-13. DOI: <http://dx.doi.org/10.1016/j.jhydrol.2009.03.020>
- Lutz, A., Thomas, J.M., and Keita, M. (2011). Effects of Population Growth and Climate Variability on Sustainable Groundwater in Mali, West Africa. *Sustainability*, 3: 21-34.
- MacDonald A.M., Calow, R.C., Macdonald, D.M.J., Darling, W.G. & Dochartaigh, O.B.E., (2009). What impact will climate change have on rural water supplies in Africa? *Hydrological Sciences Journal*, 54: 690-703.
- McCartney, M., Forkuor, G., Sood, A., Amisigo, B., Hattermann, F., and Muthuwatta, L. (2012). The waterresource implications of changing climate in the Volta River Basin. Colombo, Sri Lanka: International Water Management Institute (IWMI). 40p. IWMI Research Report 146. DOI: 10.5337/2012.219
- National Research Council, Advisory Board on the Sahel. (1983). *Agroforestry in the Sahel*. Washington, D.C.
- Post Carbon Institute. (n.d.). "Post Carbon Institute." Retrieved from [www.postcarbon.org](http://www.postcarbon.org)
- Pavelic, P., Giordano, M., Keraita, B., Ramesh, V., and Rao, T. (Eds.). (2012). *Groundwater availability and use in Sub-Saharan Africa: A review of 15 countries*. Colombo, Sri Lanka: International Water Management Institute (IWMI). 274 p. DOI: 10.5337/2012.213
- Schlink, A.C., Nguyen, M-L & Viljoen, G.J. (2010) Water requirements for livestock production: a global perspective. *Rev. Sci. Tech. Off. Int. Epiz*, 29(3): 603-619.
- Tuinoff, A., Foster, S., van Steenberg, F., Talbi A & Wishart, M. (2011) *Appropriate Groundwater Management Policy for Sub-Saharan African face of demographic pressure and climatic variability*. Sustainable Groundwater Management, Strategic Overview Series Number 5. UN-IGRAC. World Bank: Washington, D.C. 40 pp.
- UNEP. (2006). *Groundwater Pollution in Africa*. Edsitors: Yongxin Xu&Brent Usher, Tylor, and Francis.
- UNESCO. (2009). *Transboundary Aquifers: Managing a Vital Resource - The UNILC draft articles on the law of transboundary aquifers*. Saint-Denis, France.
- USAID. (2013). *Water and Development Strategy*. USAID: Washington, D.C., 33pp.
- WAWI. (2011a). *Manual on Low Cost Drilling*, prepared by SKAT and presented to USAID as annex to WAWI Final Report.
- WAWI. (2011b). *Manual on Low Cost Surveys for suitability for Low Cost Drilling*, prepared by DRI and presented to USAID as an annex to WAWI Final Report.
- WAWI. (2011c). *Technical Report on Multiple Use Services for water*, prepared by Winrock International and presented to USAID as annex to WAWI Final Report.

West Africa Gateway of Club du Sahel. (2011). "West Africa Gateway." Retrieved from [www.westafricagateway.org](http://www.westafricagateway.org)


WHYMAP, (C) BGR Hannover, and UNESCO Paris. (2006). "WMS Information of the BGR Hannover." Retrieved from <http://www.bgr.de/Service/groundwater/whymap>

# ANNEX A. GROUNDWATER MAPS

## A1. GROUNDWATER PRODUCTIVITY MAP

The groundwater productivity map indicates yields that can be reasonably expected from boreholes in different hydrogeological units. The ranges indicate the approximate interquartile range of the yield of boreholes that have been sited and drilled using appropriate techniques.

FIGURE A1. GROUNDWATER PRODUCTIVITY MAP

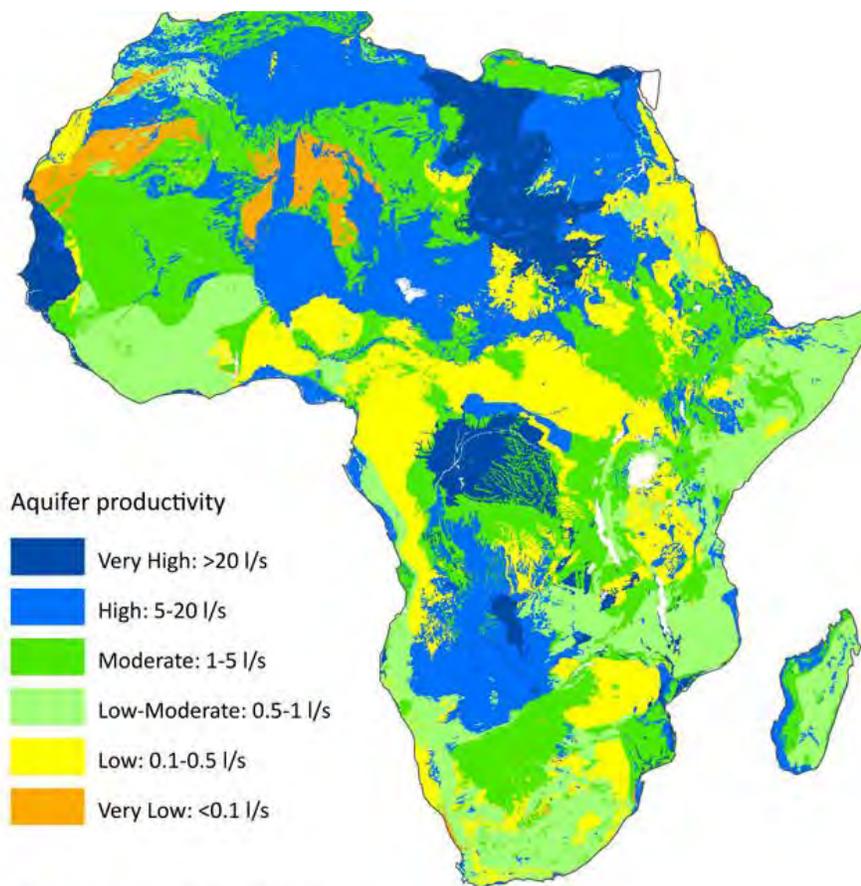


British Geological Survey © NERC 2011. All rights reserved.  
Boundaries of surficial geology of Africa, courtesy of the U.S. Geological Survey.  
Country boundaries sourced from ArcWorld © 1995-2011 ESRI. All rights Reserved

Source: *British Geological Survey, 2011*

## A2. GROUNDWATER STORAGE MAP

Groundwater storage was estimated by combining the saturated aquifer thickness and effective porosity of aquifers across Africa. For each aquifer flow/storage type, an effective porosity range was assigned based on a series of studies across Africa and surrogates in other parts of the world.

FIGURE A2. GROUNDWATER STORAGE MAP

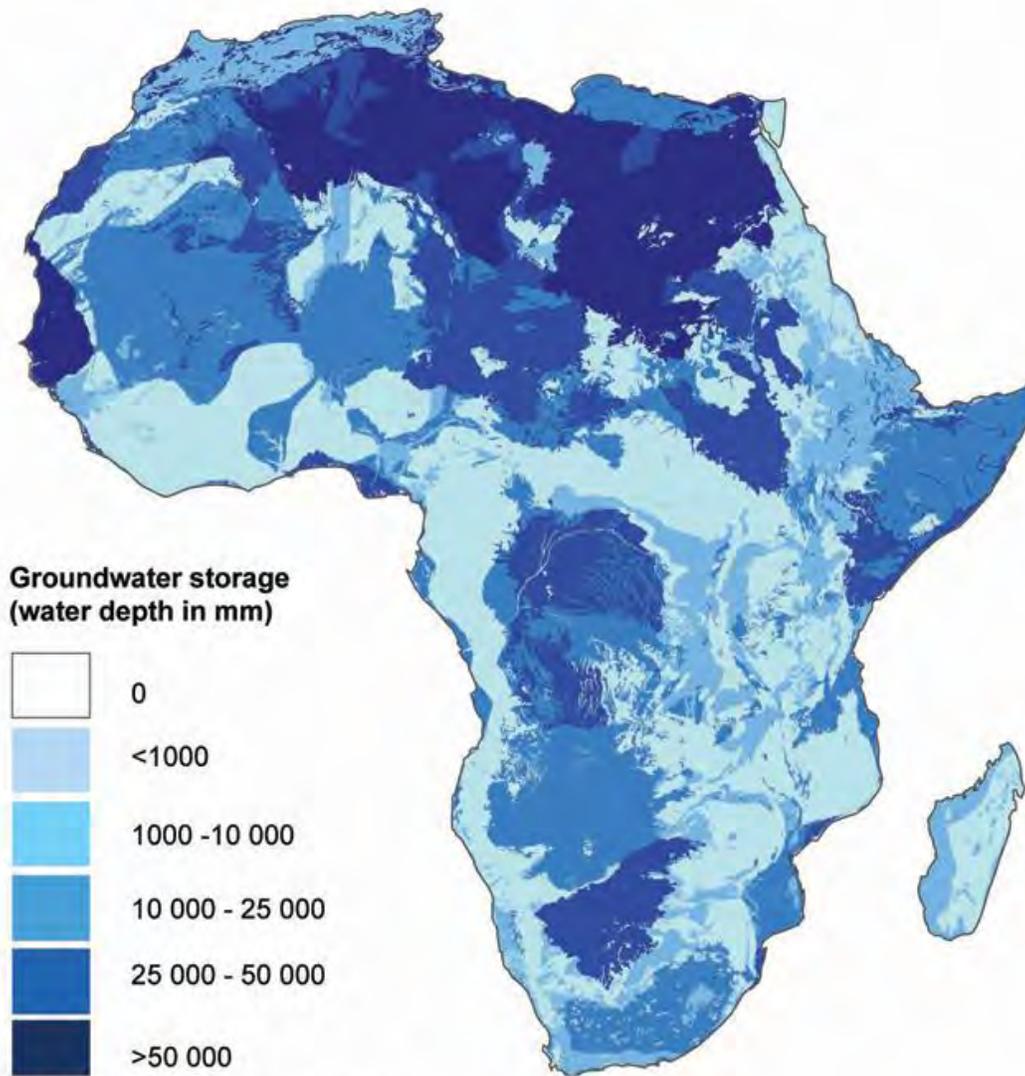


British Geological Survey © NERC 2011. All rights reserved.  
Boundaries of surficial geology of Africa, courtesy of the U.S. Geological Survey.  
Country boundaries sourced from ArcWorld © 1995-2011 ESRI. All rights Reserved

Source: *British Geological Survey, 2011*

### A3. DEPTH TO GROUNDWATER MAP

Depth to groundwater was modeled using an empirical rules-based approach and estimated according to rainfall and aquifer type, as well as proximity to rivers.

FIGURE A3. DEPTH TO GROUNDWATER MAP

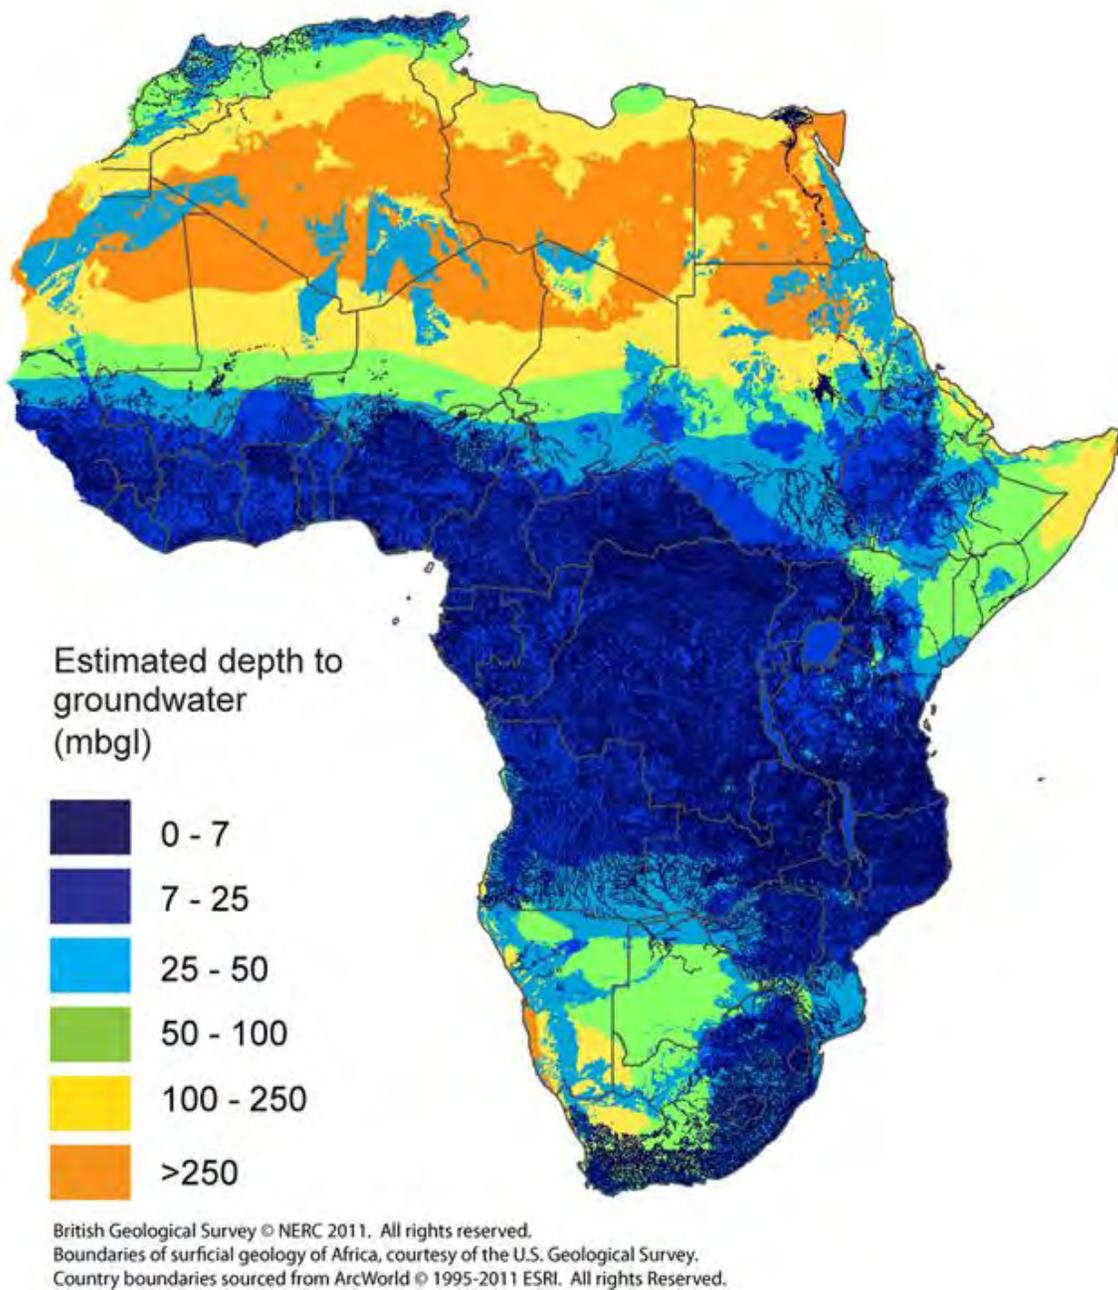

Source: British Geological Survey, 2011

**U.S. Agency for International Development**

1300 Pennsylvania Avenue, NW

Washington, DC 20523

Tel: (202) 712-0000

Fax: (202) 216-3524

[www.usaid.gov](http://www.usaid.gov)